


LOC/DME I-MRZ 109.9 Chan 36	APP CRS 100°	Rwy Idg TDZE 421 Apt Elev 421	9003
---	------------------------	---	-------------

ILS or LOC RWY 10
SYRACUSE HANCOCK INTL (SYR)

DME or RADAR required.		MALSR 	MISSED APPROACH: Climb to 900 then climbing left turn to 3000 on heading 081° and on SYR VORTAC R-111 to STODA INT/ SYR VORTAC 15.5 DME/RADAR and hold.
▼ TANUE fix minimums, for inoperative ALS, increase S-LOC 10 ▲ Cats C and D visibility to RVR 5500. **RVR 1800 authorized with use of FD or AP or HUD to DA.			

ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6	CLNC DEL 125.05 257.775
------------------------	--	--------------------------------------	-------------------------------	-----------------------------------

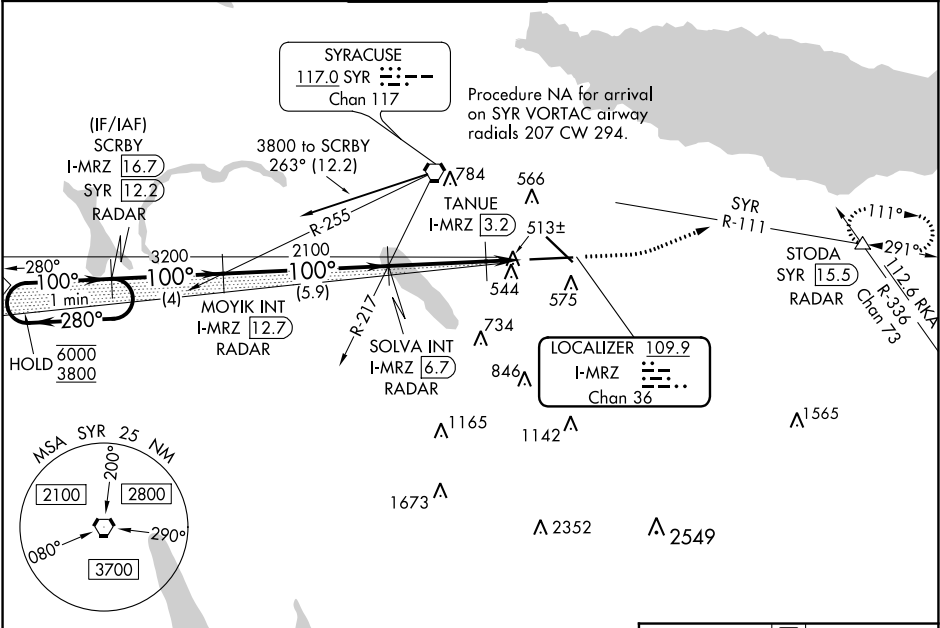

One Minute Holding Pattern		SCRBY		900	3000	STODA
		I-MRZ 16.7	SYR 12.2	hdg 081°	SYR R-111	△
RADAR		MOYIK INT		*LOC only		
		I-MRZ 12.7	SOLVA INT			
RADAR		I-MRZ 6.7		TANUE		
		I-MRZ 3.2	I-MRZ 1.6			
6000 ← 280° 3800 ← 100°		100°		100° 5.1 NM from FAF		
		3200	2100			
GS 3.00° TCH 55		2100		7500 X 150		
		*980	1 NM			
		4 NM		0.6		
		5.9 NM		3.5 NM		
		A		B		
		C		D		
CATEGORY	621/24 200 (200-½)					
S-ILS 10 **						
S-LOC 10	980/24 559 (600-½) 980/60 559 (600-1¼)					
CIRCLING	980-1 559 (600-1) 1020-1½ 599 (600-1½) 1180-2½ 759 (800-2½)					
TANUE FIX MINIMUMS (DME REQUIRED)						
S-LOC 10	780/24 359 (400-½) 780/30 359 (400-¾)					
CIRCLING	900-1 479 (500-1) 920-1 499 (500-1) 1020-1½ 599 (600-1½) 1180-2½ 759 (800-2½)					

ELEV 421 D 421

100° 5.1 NM from FAF

TWR


7500 X 150

9003 X 150

0.3% UP

A5, A3, A4, A2, A1, A0

TDZ/CL Rwy 28					
HIRL Rwy 10-28 and 15-33					
FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

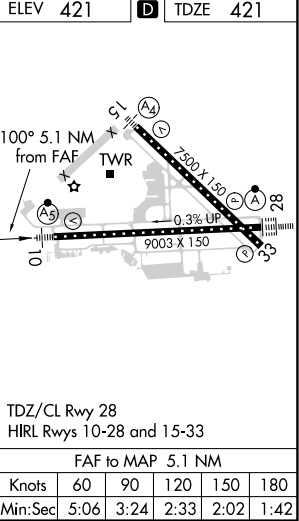

NE-2, 11 AUG 2022 to 08 SEP 2022

NE-2, 11 AUG 2022 to 08 SEP 2022