


WAAS CH 53515 W27A	APP CRS 268°	Rwy Idg 7000 TDZE 72 Apt Elev 80
--	------------------------	---

RNAV (GPS) RWY 27
NEW CASTLE (ILG)


Baro-VNAV NA when using Philadelphia Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV DA NA below -15°C (5°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use Philadelphia Intl altimeter setting: increase LPV DA to 480, LNAV/VNAV DA to 584, and all MDAs 60 feet; increase LPV all Cats and LNAV Cat C/D visibility ½ SM and LNAV/VNAV all Cats and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct BATRE and via track 273° to FLUDE and hold

ATIS 123.95	PHILADELPHIA APP CON 118.35 323.1	WILMINGTON TOWER ★ 126.00 (CTAF) 352.05	GND CON 121.7 275.8	CLNC DEL 119.95	UNICOM 122.95
----------------	--------------------------------------	--	------------------------	--------------------	------------------

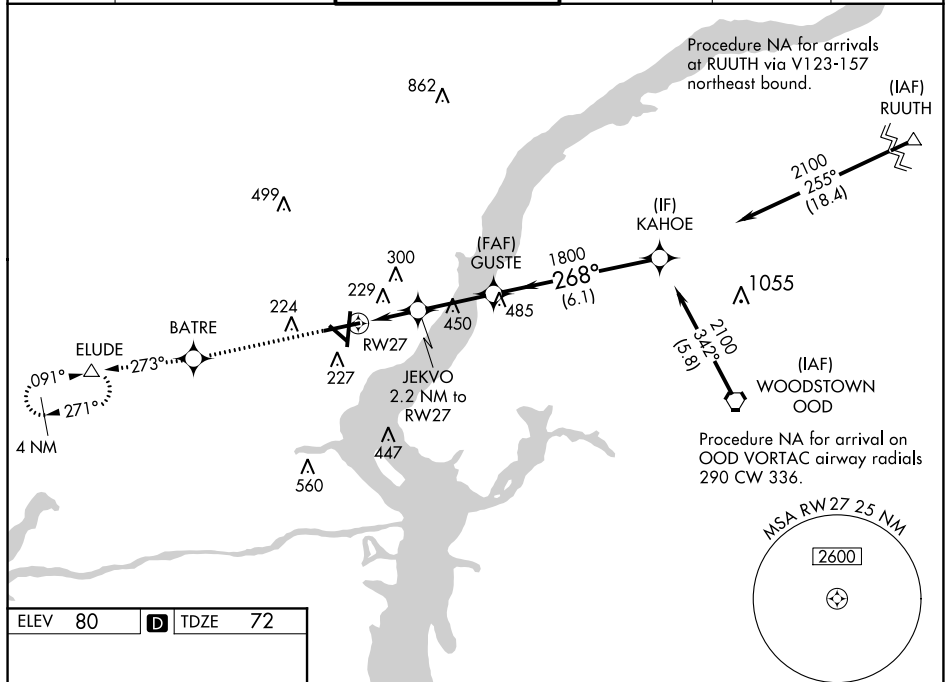

ELEV 80	D	TDZE 72
---------	----------	---------

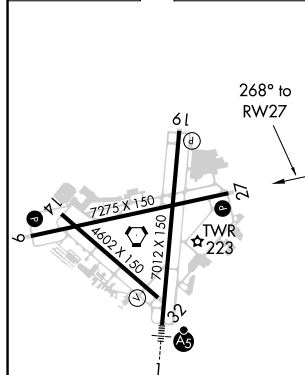

REIL Rwy 9, 19 and 27 **L**
HIRL Rwy 1-19 and 9-27 **L**
MIRL Rwy 14-32 **L**

2000 ↑	BATRE ✱	tr 273°	ELUDE △	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 54).		Procedure Turn NA
* LNAV only.						
CATEGORY	A		B		C	D
LPV DA			426-1 $\frac{1}{8}$		354 (400-1 $\frac{1}{8}$)	
RNAV/ VNAV	DA		530-1 $\frac{3}{8}$		458 (500-1 $\frac{3}{8}$)	
LNAV MDA	500-1	428 (500-1)	500-1 $\frac{1}{4}$		428 (500-1 $\frac{1}{4}$)	
CIRCLING	540-1 460 (500-1)	560-1 480 (500-1)	600-1 $\frac{1}{2}$ 520 (600-1 $\frac{1}{2}$)		800-2 $\frac{1}{4}$ 720 (800-2 $\frac{1}{4}$)	

RNAV (GPS) RWY 27