

APP CRS
101°

Rwy Idg
TDZE
1141


9708
1141
1203

RNAV (RNP) Z RWY 10C
PITTSBURGH INTL (PIT')

▼ For uncompensated Baro-VNAV systems, procedure NA below -17°C (1°F) or above 46°C (116°F). GPS Required. Simultaneous approach authorized with ILS or LOC Rwy 10L, ILS Rwy 10L (Cat II), ILS Rwy 10L (Cat III). Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 4000 on track 101° to HAVRU and on track 147° to JAPAV and on track 198° to AGC VOR/DME and hold.

D-ATIS ARR 127.25 DEP 135.9	PITTSBURGH APP CON 123.95 360.8	PITTSBURGH TOWER 128.3 291.7	GND CON SOUTH 121.9 348.6 NORTH 127.8 348.6	CLNC DEL 126.75 353.7
-----------------------------------	------------------------------------	---------------------------------	---	--------------------------

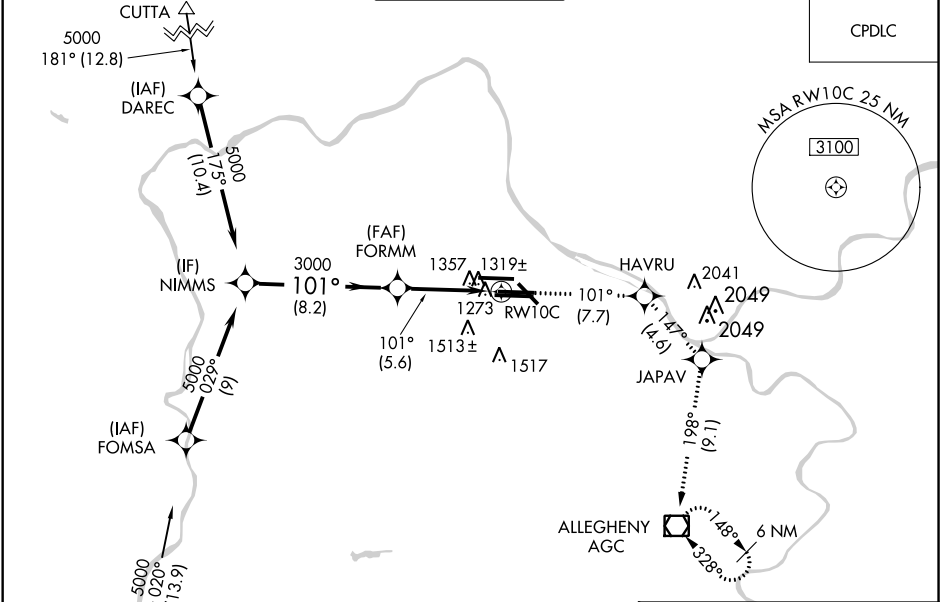

ELEV 1203

TDZE 1141

	NIMMS	FORMM	JAPAV	AGC
	↑	tr 101°	tr 147°	tr 198°
	5000	3000		
	GP 3.00°			
	TCH 51			
	8.2 NM	5.6 NM		
CATEGORY	A	B	C	D
RNP 0.11 DA		1540-1½	399 (400-1½)	
RNP 0.20 DA		1566-1½	425 (400-1½)	
RNP 0.30 DA		1669-1¾	528 (500-1¾)	

AUTHORIZATION REQUIRED

REIL Rwy 10C
HIRL all Rwys
TDZ/CL Rwys 10L, 10R, 28L, 28R, 28C, and 32