


WAAS CH 61319 W11A	APP CRS 106°	Rwy Idg TDZE Apt Elev	9800 4 4
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) Y RWY 11


LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to RVR 4000.	ALSF-2	MISSED APPROACH: Climb to 2000 direct ZUBEL and on track 195° to SAFES and hold.
---	---	--

D-ATIS 127.55	NEW ORLEANS APP CON WEST 125.5 350.35 EAST 133.15 290.3	NEW ORLEANS TOWER 119.5 254.3	GND CON 121.9 273.525	CLNC DEL 120.925	CPDLC
-------------------------	---	---	---------------------------------	----------------------------	-------

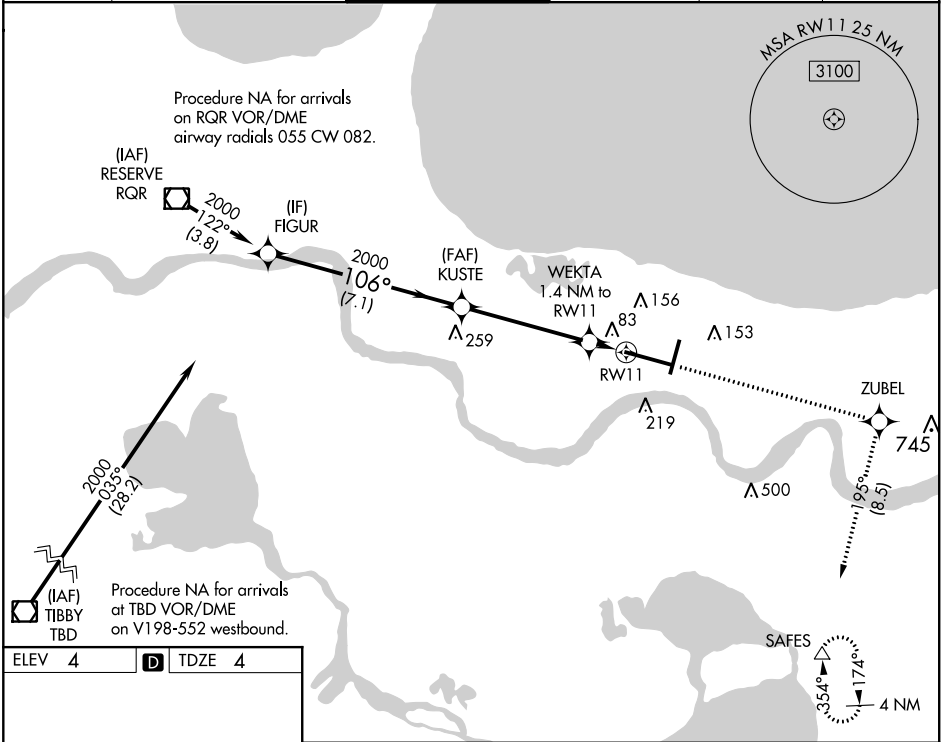

ELEV 4	D	TDZE 4
--------	----------	--------

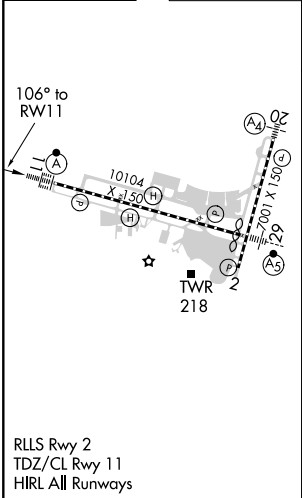

FIGUR		KUSTE		2000	ZUBEL	SAFES
2000		2000		2000		
106°		106°		*LNNAV only.		
GP 3.00°		2000		WEKTA 1.4 NM to RW11		
TCH 55		7.1 NM		*500		
CATEGORY		A		B		
LPV DA		204/18		200 (200-½)		
LNNAV/VNAV DA		254/24		250 (300-½)		
LNNAV MDA		340/24		336 (400-½)		
CIRCLING		520-1		516 (600-1)		
				580-1½		
				576 (600-½)		
				600-2		
				596 (600-2)		