

VALPARAISO, FLORIDA

RNAV (GPS) Z RWY 18

|          |            |      |
|----------|------------|------|
| APCH CRS | Rwy Idg    | 8025 |
| 184°     | TDZE       | 191  |
|          | Arprt Elev | 195  |

AL-699 (USAF)

DUKE FIELD (EGLIN AF AUX NR 3) (KEGI)

|                                                                                                               |        |                                                       |
|---------------------------------------------------------------------------------------------------------------|--------|-------------------------------------------------------|
| RNP APCH                                                                                                      | ALSF-1 | MISSED APPROACH: Climb to 3000 direct WUTAR and hold. |
| * When ALS inop, increase RVR to 40, vis to 3/4 mile.<br>** When ALS inop, increase RVR to 55, vis to 1 mile. |        |                                                       |

|                  |                                                            |                         |                           |
|------------------|------------------------------------------------------------|-------------------------|---------------------------|
| ATIS★<br>244.575 | APP CON<br>125.1 281.45 271°-089°<br>132.1 360.6 090°-270° | TOWER★<br>133.2 290.425 | GND CON<br>123.25 251.125 |
|------------------|------------------------------------------------------------|-------------------------|---------------------------|

\*\*\* When ALS inop, increase RVR to 45, vis to 7/8 mile.



\*\*\*\* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1 1/8 miles.

Circling to Rwy 18C, 36C NA at night.


Circling Visibility Reduction by Helicopters NA.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.


When Local altimeter setting not received, use Bob Sikes altimeter setting.

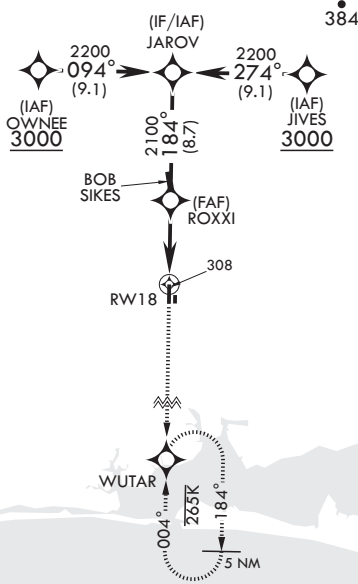


EMERG SAFE ALT 100 NM 3500



VDP NA with Bob Sikes Altimeter Setting.

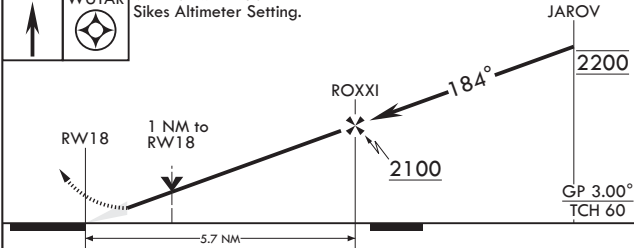

| CATEGORY                             | A           | B           | C            | D           | E            |
|--------------------------------------|-------------|-------------|--------------|-------------|--------------|
| LNAV/VNAV DA*                        | 441/24      |             | 250          | (300-½)     |              |
| LNAV MDA**                           | 560/24      | 369 (400-½) | 560/35       | 369         | (400-¾)      |
| CIRCLING                             | 660-1       | 700-1       | 700-1½       | 760-2       | 780-2        |
|                                      | 465 (500-1) | 505 (600-1) | 505 (600-1½) | 565 (600-2) | 585 (600-2)  |
| BOB SIKES ALTIMETER SETTING MINIMUMS |             |             |              |             |              |
| LNAV/VNAV DA***                      | 462/24      |             | 271          | (300-½)     |              |
| LNAV MDA****                         | 580/24      | 389 (400-½) | 580/35       | 389         | (400-¾)      |
| CIRCLING                             | 680-1       | 740-1       | 740-1½       | 760-2       | 800-2¼       |
|                                      | 485 (500-1) | 545 (600-1) | 545 (600-1½) | 605 (600-2) | 605 (700-2¼) |

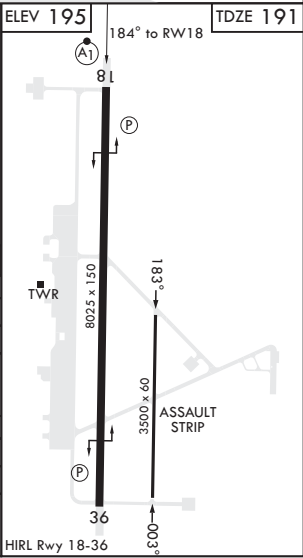

VALPARAISO, FLORIDA

30°39'N - 86°31'W

DUKE FIELD (EGLIN AF AUX NR 3) (KEGI)

Orig 14JUL22  
TERPS

RNAV (GPS) Z RWY 18

SE-3, 11 AUG 2022 to 08 SEP 2022

SE-3, 11 AUG 2022 to 08 SEP 2022