

LOC I-MWO 111.1	APP CRS 233°	Rwy Idg TDZE Apt Elev	5801 650 651
---------------------------	------------------------	-----------------------------	---

LOC RWY 23

MIDDLETOWN RGNL/HOOK FLD (MWO)

ADF required.


▼

▲ NA

Circling Rwy 5 NA at night. Circling NA to Rwys 8 and 26. Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Dayton-Wright Brothers altimeter setting and increase all MDAs 80 feet and S-23 Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2600 then climbing left turn to 3000 direct MW LOM and hold.

AWOS-3 120.025	COLUMBUS APP CON 118.85 269.275	UNICOM 123.0 (CTAF)
--------------------------	---	-------------------------------

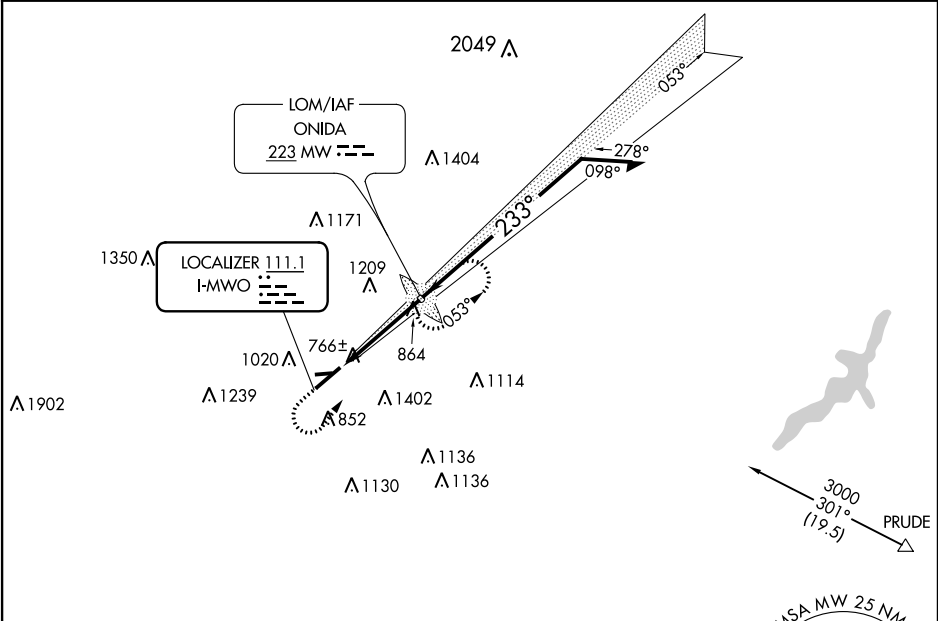

ELEV 651 TDZE 650

MIRL Rwy 5-23
REIL Rwys 5 and 23

FAF to MAP 3.9 NM					
Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18

2600 3000 MW VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 26).				MW LOM Remain within 10 NM			
CATEGORY	A		B		C		D
S-23	1140-1		490 (500-1)		1140-1⅜ 490 (500-1⅜)		1140-1½ 490 (500-1½)
CIRCLING	1480-1¼		829 (900-1¼)		1720-3 1069 (1100-3)		1940-3 1289 (1300-3)