

LOC I-BAB 109.5	APCH CRS 145°	Rwy Idg 12,001
		TDZE 113
		Arpt Elev 113


AL-771 (USAF)

BEALE AFB (KBAB)

* When ALS inop, increase CAT CDE RVR to 40 and vis to 3/4 mile.
** When ALS inop, increase CAT CDE vis to 1 3/8 miles.
*** Circling not authorized E of Rwy 15-33.

ALSF-1
MISSED APPROACH: Climb to 4400 direct to BAB TACAN. Turn right to intercept BAB R-326 to HAPAK and hold, continue climb in hold to 4400.

ATIS* 124.55 273.5	NORCAL APP CON 125.4 259.1	TOWER* 119.4 284.75	GND CON 121.6 257.75
-----------------------	-------------------------------	------------------------	-------------------------

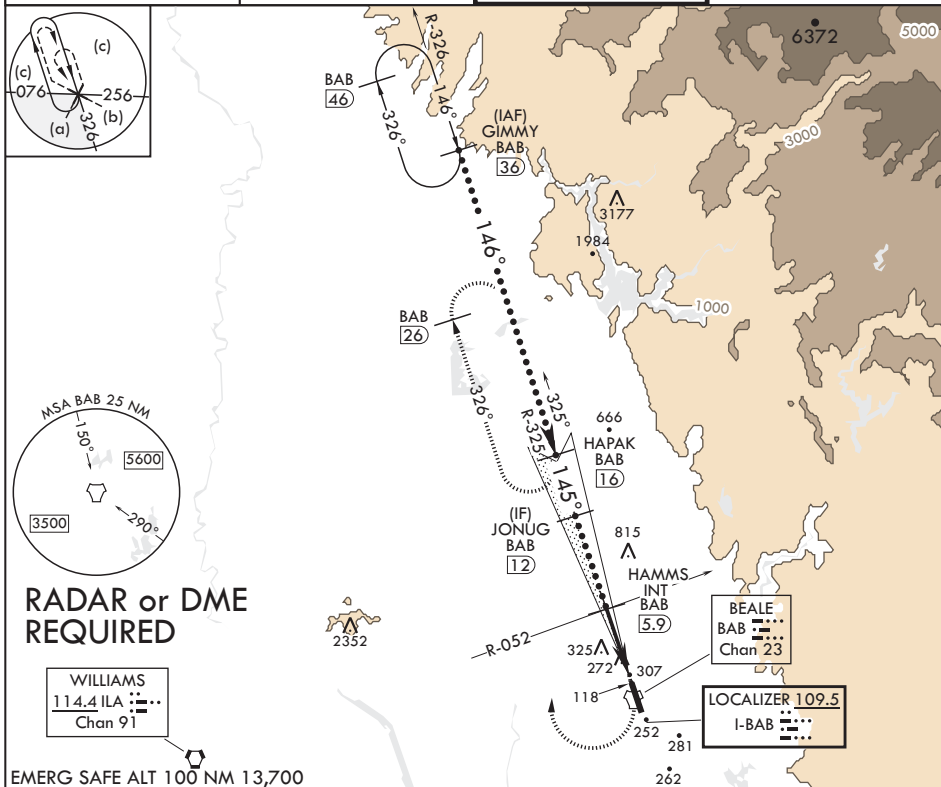

EMERG SAFE ALT 100 NM 13,700			
GIMMY 36 HAPAK 16 JONUG 12 HAMMS INT 5.9 ILA R-052			
VGS and glideslope not coincidental.			
4400 BAB R-326			
ELEV 113 TDZE 113			
12,000 3600 2600 1600 2600 1600 2600 1600			
GS 2.75° TCH 47			
4.4 NM 0.5			
CATEGORY	C	D	E
S-ILS 15*	313/24	200	(200-1/2)
S-LOC 15**	620/55	507	(600-1)
CIRCLING***	620-1 1/2 507 (600-1 1/2)	680-2 567 (600-2)	840-2 1/2 727 (800-2 1/2)