

|                                        |                        |                                                   |             |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|
| WAAS<br>CH <b>93611</b><br><b>W31A</b> | APP CRS<br><b>312°</b> | Rwy Idg<br>TDZE <b>841</b><br>Apt Elev <b>845</b> | <b>5885</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|


RNAV (GPS) RWY 31  
OTTUMWA RGNL (OTM)


**⚠** For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Fairfield altimeter setting. When local altimeter setting not received, use Fairfield altimeter setting and increase all DA 56 feet and all MDA 60 feet. Increase LNAV/VNAV all Cats and LNAV Cat C ¼ mile. For inoperative MALSR when using Fairfield altimeter setting, increase LPV all Cats visibility to 1 mile.

MALSR

MISSED APPROACH:  
Climb to 2800 direct JODUN and hold.

|                        |                                         |                               |
|------------------------|-----------------------------------------|-------------------------------|
| ASOS<br><b>124.175</b> | CHICAGO CENTER<br><b>118.15 335.575</b> | UNICOM<br><b>123.0 (CTAF)</b> |
|------------------------|-----------------------------------------|-------------------------------|

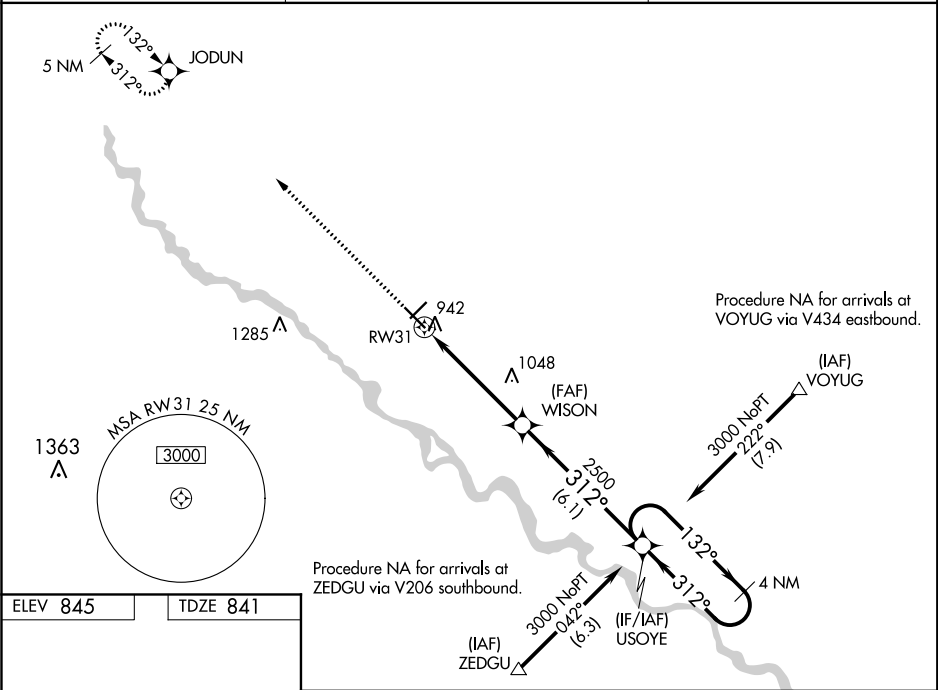

|                                                                                     |                                                                                     |                                                                                     |                        |    |                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------|----|-----------------------|
| 2800                                                                                | JODUN                                                                               | USOYE                                                                               |                        |    | 4 NM Holding Pattern  |
|  |  | WISON                                                                               |                        |    |                       |
| *LNAV only                                                                          |  |  |                        |    | 132° → 3000<br>← 312° |
|                                                                                     | 1.3 NM                                                                              | 3.7 NM                                                                              | 6.1 NM                 |    | GP 3.00°<br>TCH 52    |
| CATEGORY                                                                            | A                                                                                   | B                                                                                   | C                      | D  |                       |
| LPV DA                                                                              | 1091-1/2 250 (300-1/2)                                                              |                                                                                     |                        | NA |                       |
| LNAV/VNAV DA                                                                        | 1192-3/4 351 (400-3/4)                                                              |                                                                                     |                        | NA |                       |
| LNAV MDA                                                                            | 1300-1/2 459 (500-1/2)                                                              |                                                                                     | 1300-3/4 459 (500-3/4) | NA |                       |
| CIRCLING                                                                            | 1300-1 455 (500-1)                                                                  |                                                                                     | 1400-1/2 555 (600-1/2) | NA |                       |

NC-3, 11 AUG 2022 to 08 SEP 2022

NC-3, 11 AUG 2022 to 08 SEP 2022