


LOC/DME I-REE	APP CRS	Rwy Idg	7302
111.35	316°	TDZE	806
Chan 50 (Y)		Apt Elev	808

ILS or LOC RWY 32

SOUTHERN WISCONSIN RGNL (JVL)

DME required. RNP APCH - GPS				MALSR 	MISSED APPROACH: Climb to 1700 then climbing left turn to 3100 direct TIRRO and hold.
▼ ▲ Circling Rwy 18 NA at night. When local altimeter setting not received, use Chicago/Rockford Intl altimeter setting and increase DA to 1075, increase all MDA 80 feet. Increase S-LOC 32 Cats C and D visibility ¾ SM, and Circling Cats C/D ¼ SM. VDP NA when using Chicago/Rockford Intl altimeter setting. For inop ALS when using Chicago/Rockford Intl altimeter setting, increase S-ILS 32 visibility all Cats to ¾ SM and S-LOC 32 visibility Cats C/D to 1¾ SM.					
ATIS 128.25	ROCKFORD APP CON 121.0 327.0	JANESVILLE TOWER ★ 118.8(CTAF) 0 225.4	GND CON 121.65	CLNC DEL 121.65	UNICOM 122.95

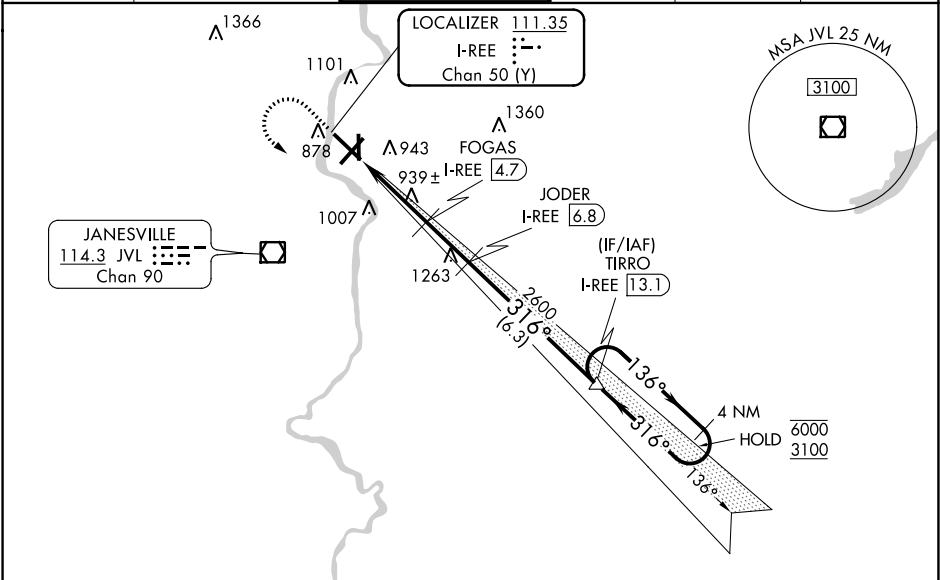

ELEV 808 D TDZE 806		HIRL Rwy 4-22 and 14-32 L	
		MIRL Rwy 18-36 L	
		REIL Rwy 14 and 22 L	
CATEGORY		A	
S-ILS 32		1006-½ 200 (200-½)	
S-LOC 32		1200-½ 394 (400-½) 1200-¾ 394 (400-¾)	
CIRCLING		1260-1 452 (500-1) 1320-1 512 (600-1) 1420-1¾ 612 (700-1¾) 1460-2 652 (700-2)	
JANESVILLE, WISCONSIN		SOUTHERN WISCONSIN RGNL (JVL)	
Amdt 1D 16JUN22		42°37'N-89°02'W	
		ILS or LOC RWY 32	