


LOC I-FFM	APP CRS	Rwy Idg	5639
111.5	308°	TDZE	1182
		Apt Elev	1183

ILS or LOC RWY 31



FERGUS FALLS MUNI/EINAR MICKELSON FLD (FFM)

ADF or DME required.	MALSR	MISSED APPROACH: Climb to 3000 then right turn direct HAMRE LOM/FFM 5.9 DME and hold.
When local altimeter setting not received, use Elbow Lake altimeter setting and increase DA to 1428 and all MDAs 60 feet; increase S-LOC Cat C/D visibility ½ SM and Circling Cat C/D visibility ¼ SM. For inop MALSR, increase S-LOC 31 Cat D visibility ¼ mile. GS unusable for coupled approaches below 1400.		

AWOS-3 110.4	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
-----------------	-----------------------------------	--------------------------

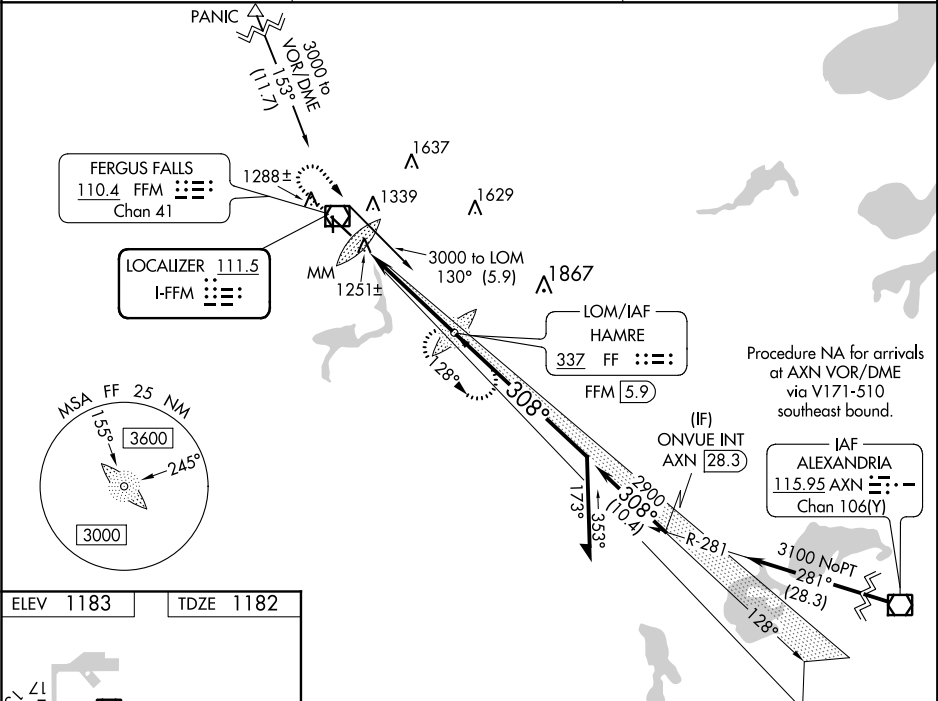

ELEV 1183	TDZE 1182
-----------	-----------

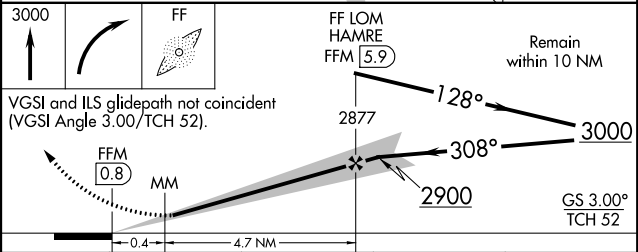

CATEGORY	A	B	C	D
S-ILS 31	1382-½ 200 (200-½)			
S-LOC 31	1520-½ 338 (400-½)			1520-¾ 338 (400-¾)
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1¾ 637 (700-1¾)	1940-2½ 757 (800-2½)