

WAAS CH 93505 W24A	APP CRS 242°	Rwy Idg TDZE Apt Elev	5054 20 20
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 24

APALACHICOLA RGNL-CLEVE RANDOLPH FLD (AAF)


Baro-VNAV and VDP NA when using Northwest Florida Beaches Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (-5°F) or above 54°F (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Northwest Florida Beaches Intl altimeter setting: increase LPV DA to 493, LNAV/VNAV DA to 512 and all MDAs 140 feet; increase LPV and LNAV/VNAV all Cats visibility ½ SM, LNAV Cats C/D visibility ¾ SM, and Circling Cats C/D visibility ½ SM. Circling Rwy 6, 14, 18, 24, 32 NA at night.


MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct ASVOY and hold, continue climb-in-hold to 3000.

ASOS 119.925	TYNDALL APP CON ★ 124.15	UNICOM 122.8 (CTAF)
------------------------	------------------------------------	-------------------------------

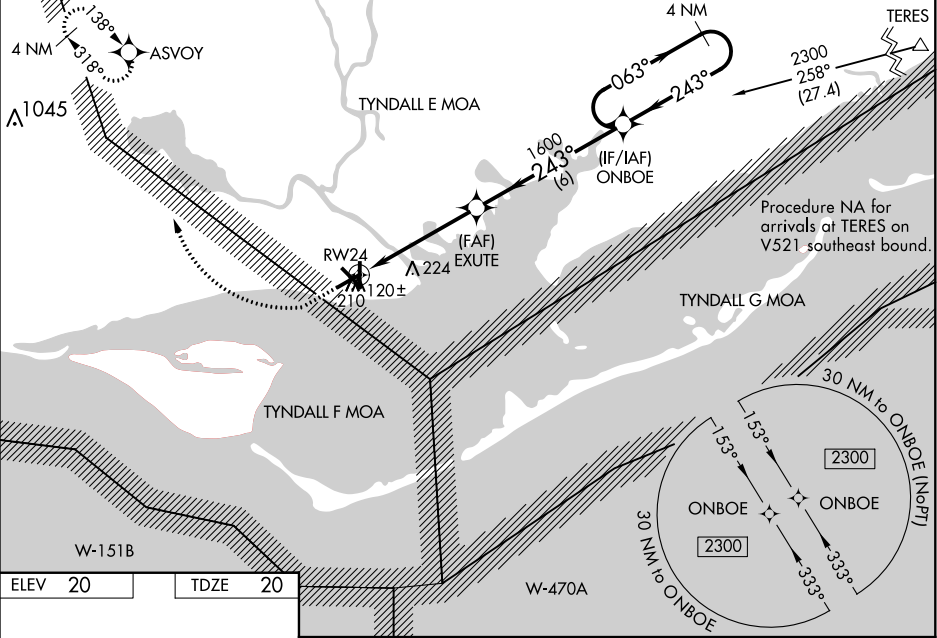

ELEV 20	TDZE 20
---------	---------

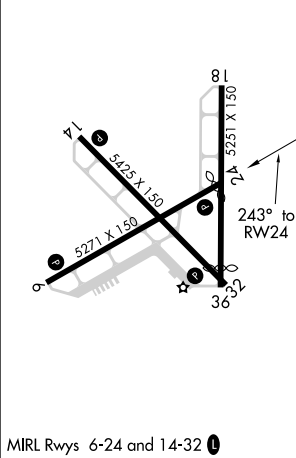

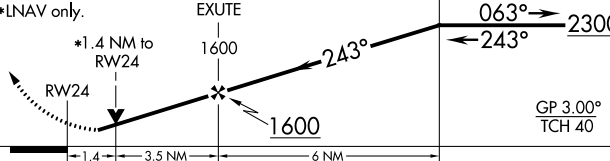600	3000	ASVOY				
						
*LNAV only.			EXUTE	ONBOE	4 NM Holding Pattern	
			1600			
CATEGORY			A	B	C	D
LPV	DA	359-1½ 339 (400-1½)				
LNAV/ VNAV	DA	378-1¼ 358 (400-1¼)				
LNAV	MDA	500-1 480 (500-1)			500-1½ 480 (500-1½)	
CIRCLING		520-1 500 (500-1)			680-1¼ 660 (700-1¼)	680-2 660 (700-2)