

LOC I-GTR	APP CRS	Rwy ldg	8003
110.7	182°	TDZE	264
		Apt Elev	264

ILS or LOC RWY 18



GOLDEN TRIANGLE RGNL (GTR)

⚠ For inop MALSR, increase S-ILS 18 Cat E visibility to ¾ mile, S-LOC 18 Cat E visibility to 1½ mile. When local altimeter setting not received, use Columbus AFB altimeter setting and increase DA 39 feet and all MDA 40 feet; increase S-LOC 18 Cats C/D/E visibility to ¾ mile. For inop MALSR when using Columbus AFB altimeter setting, increase S-ILS 18 Cat E visibility to ¾ mile, S-LOC 18 Cat E visibility to 1½ mile.

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 2100 on heading 090° and on IGB R-180 to IGB VORTAC and hold.

ATIS	COLUMBUS APP CON *	GOLDEN TRIANGLE TOWER *	GND CON	CLNC DEL
126.375	135.6 323.275	118.2 (CTAF) 0 298.875	135.375 322.475	135.375 322.475

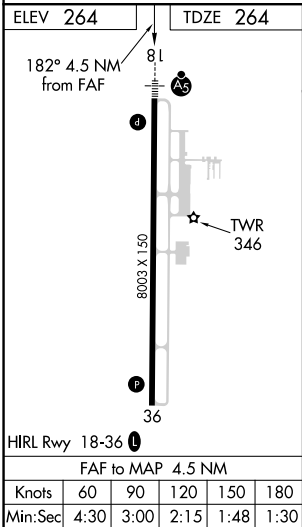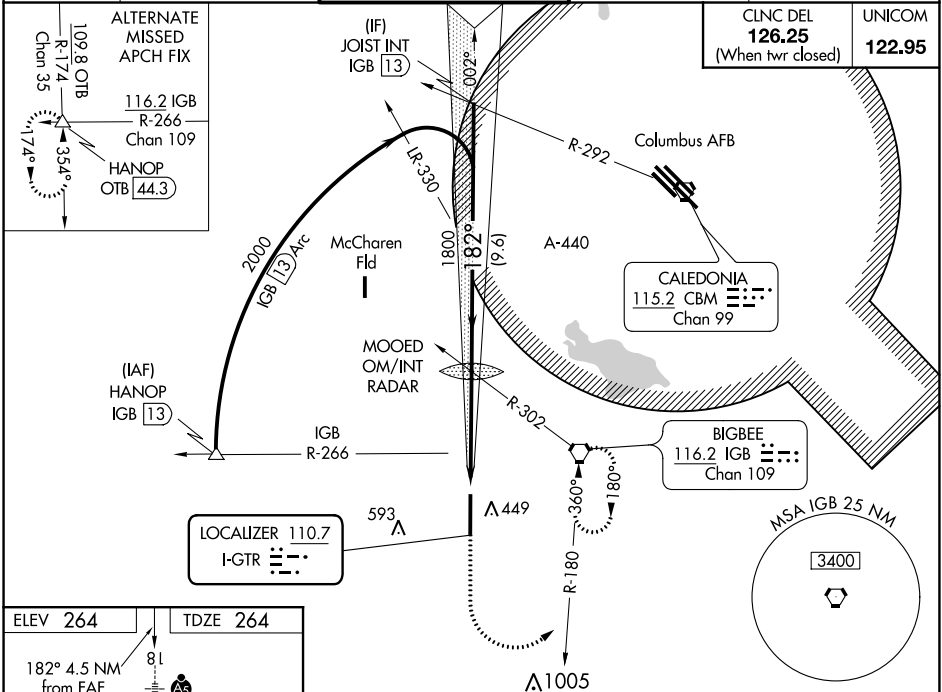

800	2100	IGB R-180	IGB	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 56).	
↑	hdg 090°		☐		
			MOOD OM/INT RADAR	JOIST INT IGB 13	
			1757	182°	2000
			1800		
			4.5 NM	9.6 NM	
GS 3.00° TCH 58					
CATEGORY	A	B	C	D	E
S-ILS 18	464-½ 200 (200-½)				
S-LOC 18	660-½	396 (400-½)	660-⅝ 396 (400-⅝)		
CIRCLING	760-1	496 (500-1)	960-2 696 (700-2)	960-2¼ 696 (700-2¼)	960-2½ 696 (700-2½)

SC-4, 11 AUG 2022 to 08 SEP 2022

SC-4, 11 AUG 2022 to 08 SEP 2022