

WAAS CH 69419 W13A	APP CRS 136°	Rwy Idg TDZE Apt Elev	4002 1140 1140
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

LITCHFIELD MUNI (LJF)


RNP APCH - GPS.

▼ Baro-VNAV NA when using Hutchinson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54° C. Visibility reduction by helicopters

▲ NA. When local altimeter setting not received, use Hutchinson altimeter setting: increase LPV DA to 1436 feet; increase LNAV/VNAV DA to 1980 feet and visibility all Cats ¼ SM; increase all MDA 60 feet and Circling Cat C visibility ¼ SM. VDP NA with Hutchinson altimeter setting.

MISSED APPROACH:
Climb to 2800 direct ANIML and hold.

AWOS-3 119.65	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9 0
-------------------------	--	------------------------

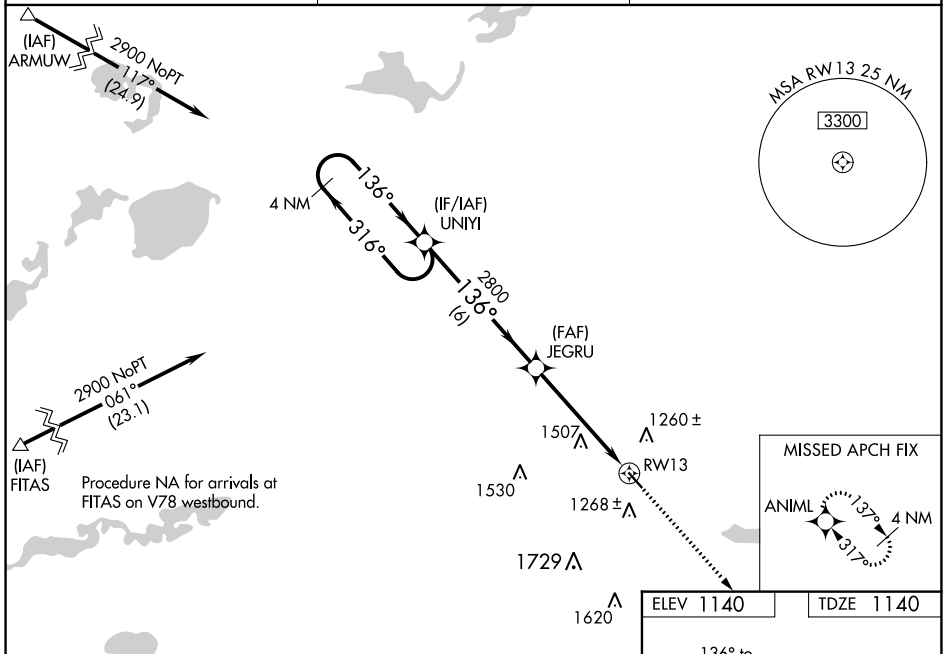

NC-1, 11 AUG 2022 to 08 SEP 2022

NC-1, 11 AUG 2022 to 08 SEP 2022

4 NM Holding Pattern		UNYI	JEGRU	2800 ANIML
2900	← 316°	→ 136°	136°	*LNAV only
GP 3.00°		2800	*2 NM to RWY 13	RWY 13
TCH 39		6 NM	3 NM	2 NM
CATEGORY	A	B	C	D
LPV DA	1390-1		250 (300-1)	
LNAV/VNAV DA	1934-2¾		794 (800-2¾)	
LNAV MDA	1820-1	680 (700-1)	1820-2 680 (700-2)	1820-2¼ 680 (700-2¼)
CIRCLING	1820-1	680 (700-1)	1860-2 720 (800-2)	2080-3 940 (1000-3)

ELEV 1140 TDZE 1140

REIL Rwy 13 and 31
MIRL Rwy 13-31