


|                |             |                     |
|----------------|-------------|---------------------|
| LOC/DME I-BYH  | APP CRS     | Rwy Idg             |
| <b>110.3</b>   | <b>181°</b> | <b>11602</b>        |
| Chan <b>40</b> |             | TDZE <b>250</b>     |
|                |             | Apt Elev <b>254</b> |

ILS or LOC RWY 18  
ARKANSAS INTL (BYH)

|                                                                                       |                                                                                                                                                                                    |
|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RADAR required for procedure entry. RNP APCH-GPS and DME required.                    |                                                                                                                                                                                    |
| NA                                                                                    | Obtain local altimeter setting on CTAF, when not received, use Blytheville Muni altimeter setting and increase DA to 464 feet and all MDAs 20 feet. Circling NA east of Rwy 18-36. |
| MISSED APPROACH: Climb to 1900 then climbing left turn to 2500 direct GURLY and hold. |                                                                                                                                                                                    |

|                                        |                                 |
|----------------------------------------|---------------------------------|
| MEMPHIS CENTER<br><b>134.65 316.15</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|----------------------------------------|---------------------------------|

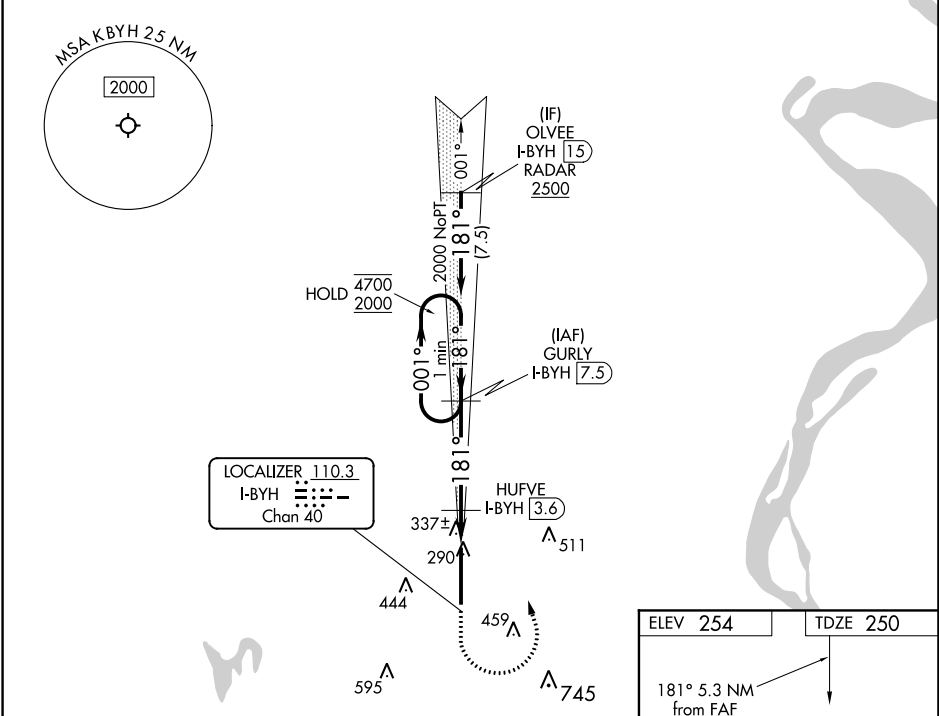

|                                                                                                                                                                                                                                    |                       |                      |                        |                      |  |      |  |                 |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|----------------------|------------------------|----------------------|--|------|--|-----------------|--|
| <p>One Minute Holding Pattern</p> <p>4700 ← 001°<br/>2000 → 181°</p> <p>GS 3.00°<br/>TCH 54</p> <p>2000</p> <p>3.9 NM</p> <p>740</p> <p>0.5 NM</p> <p>0.9 NM</p> <p>1900 I-BYH 7.5</p> <p>2500 I-BYH 7.5</p> <p>1900 I-BYH 7.5</p> |                       | GURLY I-BYH 7.5      |                        | 1900                 |  | 2500 |  | GURLY I-BYH 7.5 |  |
| CATEGORY                                                                                                                                                                                                                           | A                     | B                    | C                      | D                    |  |      |  |                 |  |
| S-ILS 18                                                                                                                                                                                                                           | 450-3/4 200 (200-3/4) |                      |                        |                      |  |      |  |                 |  |
| S-LOC 18                                                                                                                                                                                                                           | 600-1 350 (400-1)     |                      |                        |                      |  |      |  |                 |  |
| CIRCLING                                                                                                                                                                                                                           | 700-1<br>446 (500-1)  | 720-1<br>466 (500-1) | 800-1½<br>546 (600-1½) | 820-2<br>566 (600-2) |  |      |  |                 |  |

