


ATIS
120.75
CLNC DEL
121.9

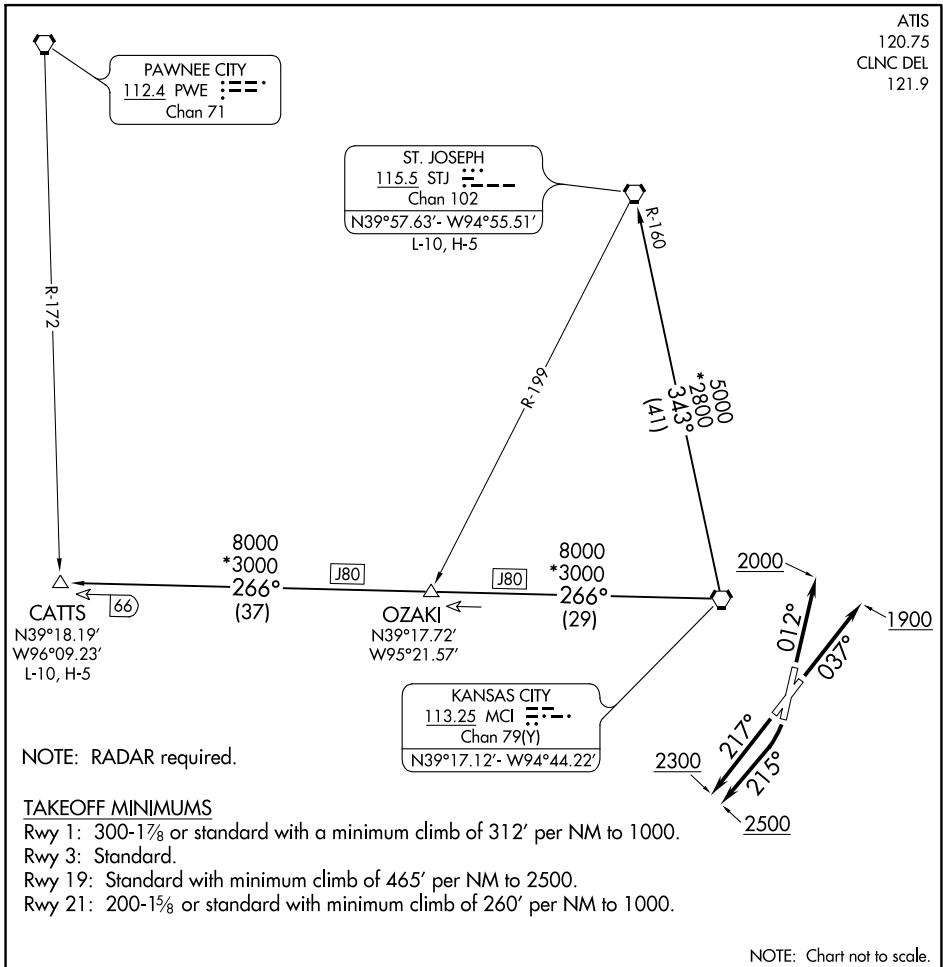

NC-3, 08 SEP 2022 to 06 OCT 2022

NC-3, 08 SEP 2022 to 06 OCT 2022

NOTE: RADAR required.

TAKEOFF MINIMUMS

- Rwy 1: 300-1 $\frac{7}{8}$ or standard with a minimum climb of 312' per NM to 1000.
- Rwy 3: Standard.
- Rwy 19: Standard with minimum climb of 465' per NM to 2500.
- Rwy 21: 200-1 $\frac{5}{8}$ or standard with minimum climb of 260' per NM to 1000.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RUNWAY 1: Climb heading 012° to 2000, thence. . .
- TAKEOFF RUNWAY 3: Climb heading 037° to 1900, thence. . .
- TAKEOFF RUNWAY 19: Climbing right turn heading 215° to 2500, thence. . .
- TAKEOFF RUNWAY 21: Climb heading 217° to 2300, thence. . .

. . . climb on assigned heading for RADAR vectors to appropriate route. Expect filed altitude 10 minutes after departure.

CATTS TRANSITION (CHIEF7.CATTS): From over MCI VORTAC on MCI R-266 to CATTS INT.

ST. JOSEPH TRANSITION (CHIEF7.STJ): From over MCI VORTAC on MCI R-343 and STJ R-160 to STJ VORTAC.