

APP CRS 007°	Rwy Idg 6869 TDZE 14 Apt Elev 14
------------------------	---

RNAV (RNP) RWY 1

RONALD REAGAN WASHINGTON NTL (DCA)

T For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 48°C (120°F). RF required. GPS required. Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30 all Cats visibility to 1¾ mile.

ALSF-2



MISSED APPROACH: (Do not exceed 185K until FIVUD) Climb to 2200 left turn to FIVUD and on track 327° to HESLO and on track 327° to GTN NDB and hold.



D-ATIS 132.65	POTOMAC APP CON		WASHINGTON TOWER		GND CON		CLNC DEL	CPDLC
119.85 239.25 124.2 360.8	(WEST/SOUTH) (EAST)		119.1 257.6		121.7 257.6		128.25	

MISSED APCH FIX



GEORGETOWN
GTN

Prohibited area (P-56) 1.5 NM north of DCA- avoid surface to 18000 MSL.

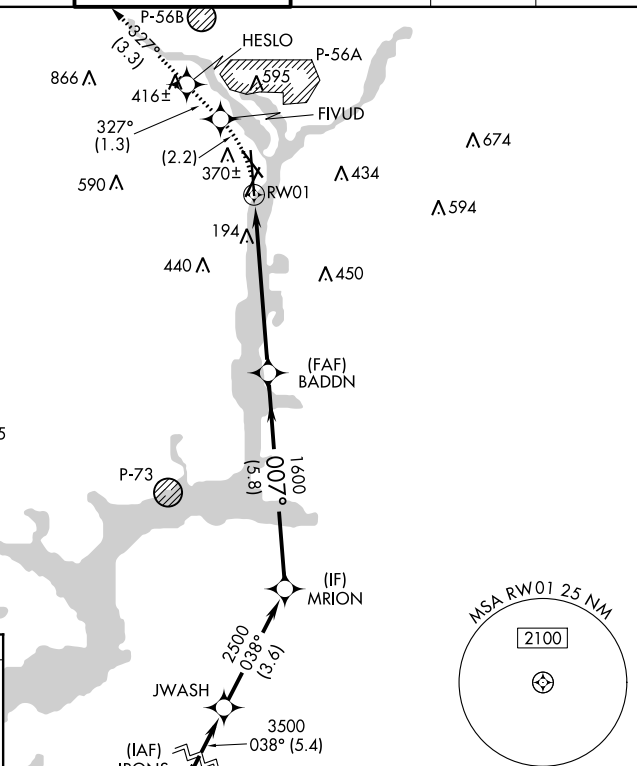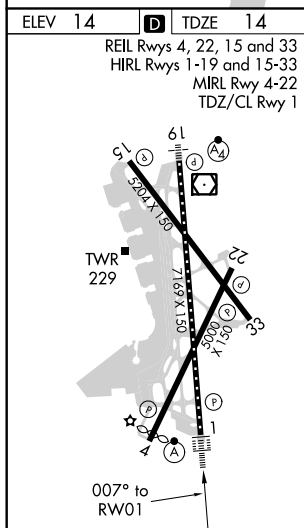

2200 ↑	FIVUD tr 327°	HESLO tr 327°	GTN 	
CATEGORY	A	B	C	D
RNP 0.30 DA	552/60 538 (600-1¼)			