



TOP ALTITUDE:
11000

RNAV 1 - DME/DME/IRU or GPS.
RADAR required for non-GPS equipped aircraft.

D-ATIS
123.75
CLNC DEL
121.6 284.6
CPDLC
GND CON
121.9 284.6
PALM BEACH TOWER
119.1 257.8
PALM BEACH DEP CON
128.3 317.4

(OLAKE2.OLAKE) 22195
OLAKE TWO DEPARTURE (RNAV)

PALM BEACH INTL (PBI)
WEST PALM BEACH, FLORIDA

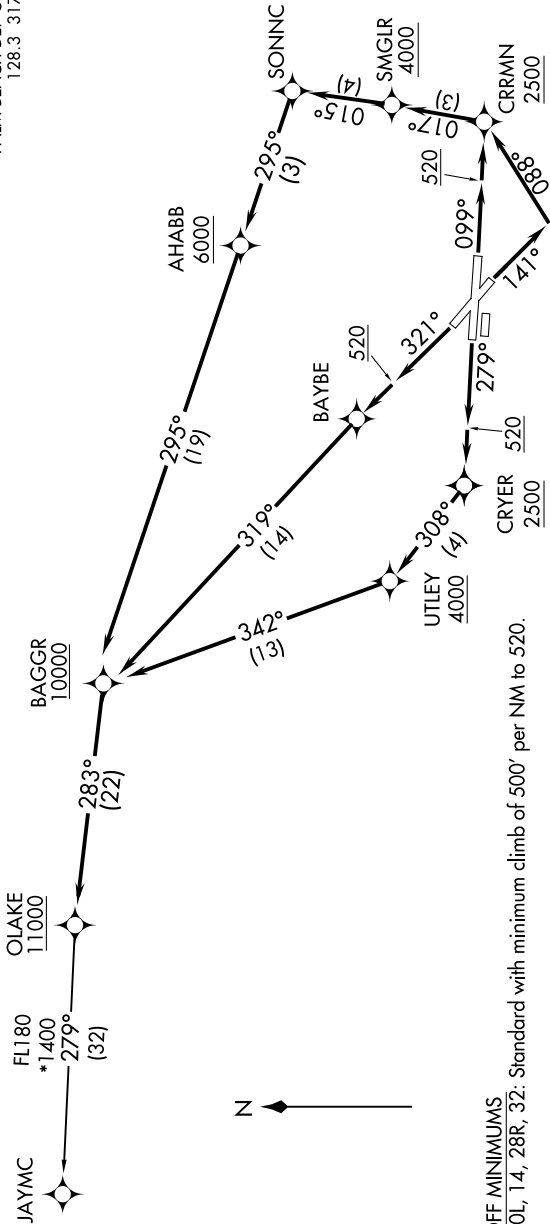

TAKEOFF MINIMUMS
Rwys 10L, 14, 28R, 32: Standard with minimum climb of 500' per NM to 520.

NOTE: Turbo-jets only.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

(OLAKE2.OLAKE) 19MAY22
OLAKE TWO DEPARTURE (RNAV)

WEST PALM BEACH, FLORIDA
PALM BEACH INTL (PBI)