

APP CRS

Rwy Idg

6300

TDZE

6451

Apt Elev

6451

RNAV (RNP) X RWY 19

JACKSON HOLE (JAC)

RNP AR APCH-GPS.

▼

-21°C

For uncompensated Baro-VNAV systems, procedure NA below -27°C or above 54°C. For inop ALS, increase RNP 0.20# all Cats visibility to RVR 6000. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM.


MALS

⬇

2

MISSED APPROACH: Climb to 14000 on track 190° to HIPUL and on track 193° to KICNE and hold, continue climb-in-hold to 14000. *Missed approach requires minimum climb of 226 feet per NM to 11600. #Missed approach requires minimum climb of 215 feet per NM to 11600.

D-ATIS	SALT LAKE CENTER	JACKSON TOWER★	GND CON	UNICOM
120.625	133.25 285.6	118.075 (CTAF) 0	124.55	122.95

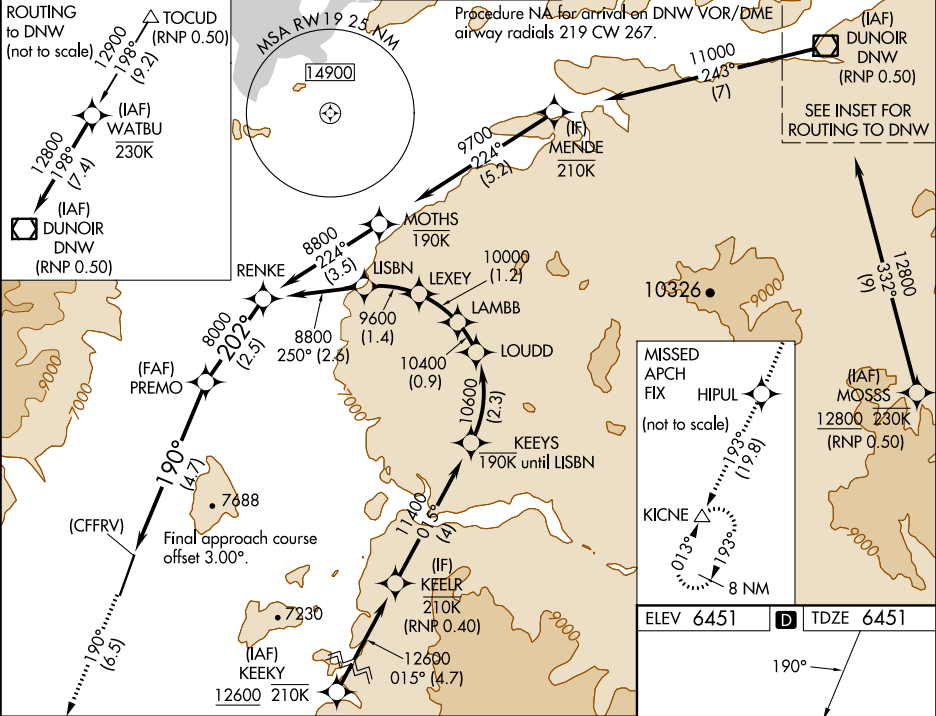

14000	HIPUL	tr 190°	tr 193°	KICNE
See planview for multiple IF locations.				
(CFFRV)				
4.7 NM				
2.5 NM				
CATEGORY	A	B	C	D
RNP 0.10 DA*	6777/40 326 (400-¾)			
RNP 0.20 DA#	6856/50 405 (500-1)			
RNP 0.30 DA#	6938/60 487 (500-1½)			
RNP 0.30 DA	7045-1¾ 594 (600-1¾)			

AUTHORIZATION REQUIRED

