

APP CRS

309°

Rwy Idg

4499

TDZE

1715

Apt Elev

1723

RNAV (GPS) RWY 31

CHAUTAUQUA COUNTY/JAMESTOWN (JHW)

RNP APCH-GPS

▼

NA

Rwy 31 Straight-in/Circling and Circling to Rwy 13 NA at night.
When local altimeter setting not received, use Dunkirk altimeter setting:
increase all MDAs 200 feet and visibility LNAV Cats C/D ¾ SM, Circling Cat C ½ SM and Circling Cat D ¾ SM. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 4000 direct CRYST WP and hold.

AWOS-3PT

118.425

BUFFALO APP CON ★


126.05

CLNC DEL

126.05

UNICOM

122.975 (CTAF) 0

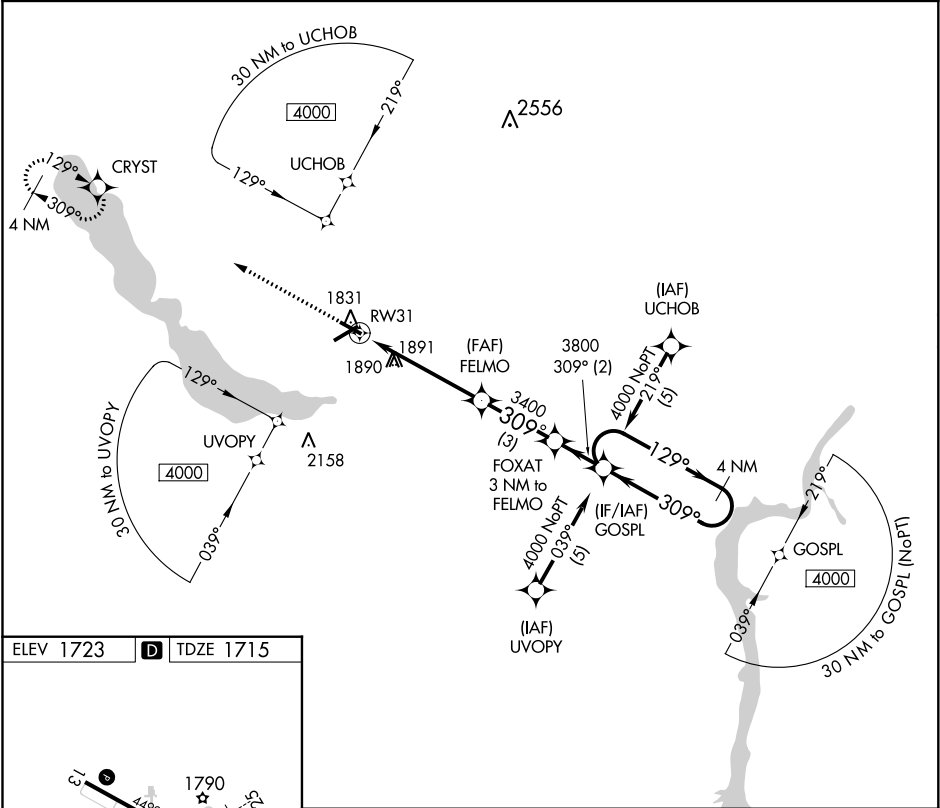

ELEV 1723

D

TDZE 1715

4000

CRYST

4499 X 100

5299 X 100

1790

309° to RW31

4000

CRYST

FOXAT 3 NM to FELMO

GOSPL

4 NM Holding Pattern

RW31

FELMO

3400

3800

129°

309°

4000

5 NM

3 NM

2 NM

CATEGORY	A	B	C	D
LNAV MDA	2200-1	485 (500-1)	2200-1¼ 485 (500-1¼)	2200-1½ 485 (500-1½)
CIRCLING	2200-1	477 (500-1)	2260-1½ 537 (600-1½)	2340-2 617 (700-2)

REIL Rwy 31 0

MIRL Rwy 13-31 0

HIRL Rwy 7-25 0