


LOC/DME I-HCV	APP CRS	Rwy Idg	6215
110.3	052°	TDZE	947
Chan 40		Apt Elev	947

ILS or LOC RWY 5

WEST VIRGINIA INTL YEAGER (CRW)

▽ ▲		MISSED APPROACH: Climb to 1800 then climbing left turn to 3500 direct HVQ VOR/DME and hold.		
ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL
127.6	124.1 269.125	125.7 257.8	121.8 348.6	118.55

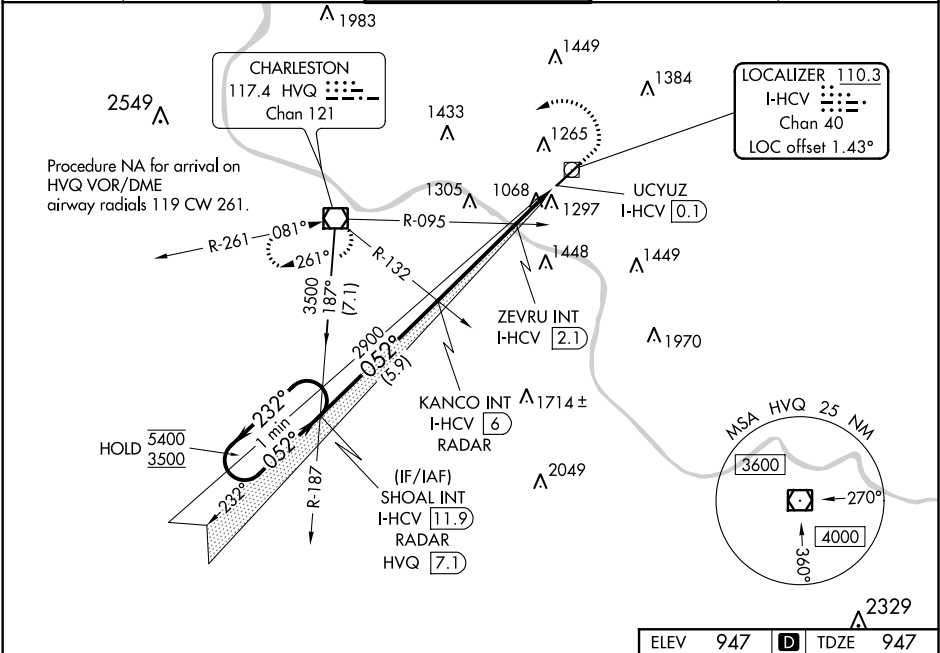

One Minute Holding Pattern		SHOAL INT I-HCV <u>11.9</u> RADAR	KANCO INT I-HCV <u>6</u> RADAR	* LOC only		1800 ↑	3500 ↘	HVQ ◻
5400 ← 232° 3500 → 052°		052°	2900	ZEVRU INT I-HCV <u>2.1</u>	I-HCV DME ANTENNA	UCYUZ I-HCV <u>0.1</u>		
GS 3.00° TCH 56		2900	*1640	*I-HCV <u>1.1</u>		1 NM 1 NM 0.1		
		5.9 NM 3.9 NM						
CATEGORY	A		B	C	D			
S-ILS 5			1197/40		250 (300-¾)			
S-LOC 5	1640/55		693 (700-1)		1640-2		693 (700-2)	
C CIRCLING	1640-1		693 (700-1)		1760-2½ 813 (900-2½)		1880-3 933 (1000-3)	
ZEVRU FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)								
S-LOC 5			1320/55		373 (400-1)			
C CIRCLING	1600-1		653 (700-1)		1760-2½ 813 (900-2½)		1880-3 933 (1000-3)	

