ILS or LOC RWY 35

VALDOSTA RGNL (VLD)

LOC I-VLD	APP CRS	Rwy Idg	8002
110.9	356°	TDZE	200
		Apt Elev	203

For inop MALSR, increase S-ILS 35 all Cats visibility to 1 mile and S-LOC 35 Cats A, B visibility to 1 mile, Cat E visibility to 1½ mile. Visibility reduction by helicopters NA. When local altimeter setting not received, use Moultrie altimeter setting and increase DA to 577 feet and all MDA 100 feet; increase S-LOC 35 visibility Cats C and D ¼ SM, Cat E ½ SM and Circling Cat C and D ¼ SM. DME from OTK VOR/DME. For inop MALSR, when using Moultrie altimeter setting, increase S-ILS 35 Cat E visibility to 1¼ mile and increase S-LOC 35 Cats A and B visibility to 1 mile, Cat E to 2 miles. Circling to Rwy 4, 13, and 31 NA at night.

MALSR

MISSED APPROACH: Climb to 1200 then climbing left turn to 2000 direct OTK VOR/DME and hold, continue climb-in-hold to 2000.

ASOS	VALDOSTA APP CON ★	VALDOSTA TOWER ★	GND CON	UNICOM
126.225	126.6 285.6	120.9 (CTAF) L	121.7	122.95

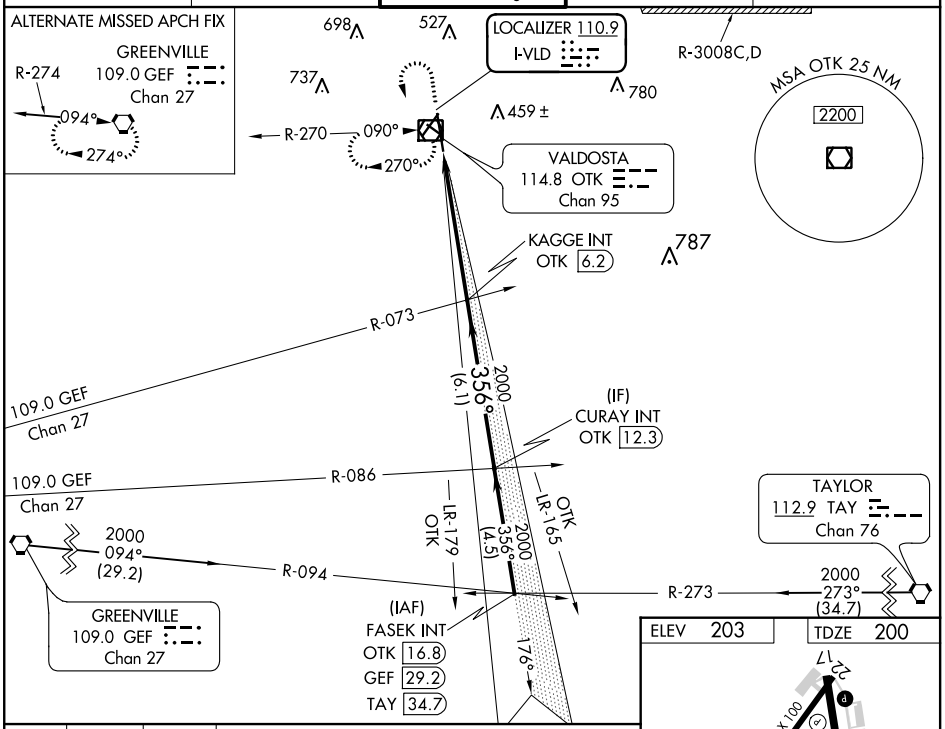

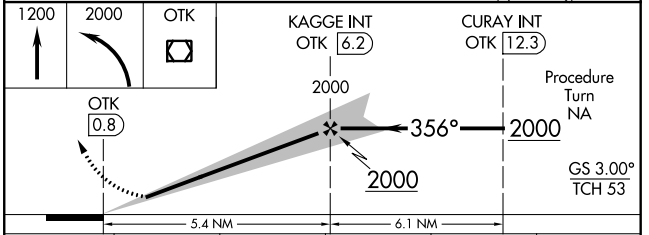

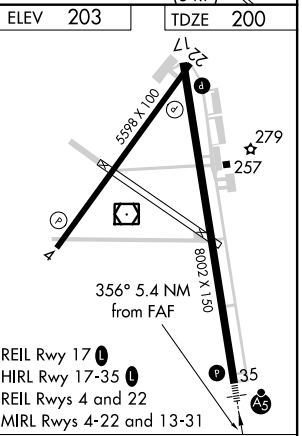

CATEGORY	A	B	C	D	E
S-ILS 35	489-¾ 289 (300-¾)				
S-LOC 35	660-¾ 460 (500-¾)			660-1 460 (500-1)	
CIRCLING	660-1 457 (500-1)	700-1 497 (500-1)	900-2 697 (700-2)	1020-2¾ 817 (900-2¾)	1040-3 837 (900-3)

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

SE-4, 08 SEP 2022 to 06 OCT 2022