


LOC I-SKC 109.5	APP CRS 103°	Rwy Idg 5849 TDZE 901 Apt Elev 911
---------------------------	------------------------	---

ILS or LOC RWY 10

WAUKESHA COUNTY (U/S)

RADAR required for procedure entry.					MALSRR 	MISSED APPROACH: Climb to 1500 then climbing left turn to 2800 direct BAE VORTAC and hold.
▼ ▲ For inoperative MALSRR, increase S-LOC 10 Cat C/D visibility to 1 3⁄8 mile. For inop MALSRR when using Lawrence J Timmerman altimeter setting, increase S-LOC 10 Cat C/D visibility to 1 3⁄8 mile. When local altimeter setting not received, use Lawrence J Timmerman altimeter setting: increase DA to 1147 feet; increase all MDAs 60 feet and increase S-LOC 10 Cat C and D and Circling Cat C and D visibility 1⁄4 SM.						
ATIS 118.875	MILWAUKEE APP CON 125.35 307.0	WAUKESHA TOWER ★ 123.7 (CTAF) 0	GND CON 121.6	CLNC DEL 121.6	CLNC DEL 128.7 (When twr closed)	UNICOM 122.95

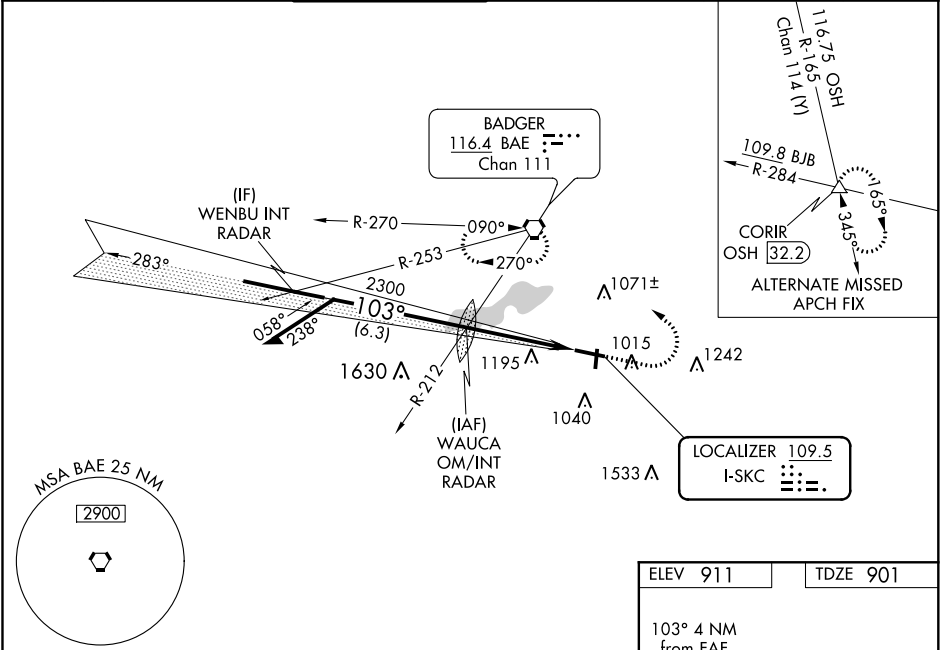

Remain within 10 NM	WAUCA OM/INT RADAR			
	WENBU INT RADAR	2800	103°	2300
GS 3.00° TCH 53				
6.3 NM 4 NM				
CATEGORY	A	B	C	D
S-ILS-10	1101-1⁄2		200 (200-1⁄2)	
S-LOC-10	1400-1⁄2	499 (500-1⁄2)	1400-1	499 (500-1)
CIRCLING	1460-1 549 (600-1)	1500-1 589 (600-1)	1540-1 3⁄4 629 (700-1 3⁄4)	1640-2 1⁄4 729 (800-2 1⁄4)

