

|               |         |          |      |
|---------------|---------|----------|------|
| LOC/DME I-CBE | APP CRS | Rwy Idg  | 5047 |
| 110.5         | 228°    | TDZE     | 775  |
| Chan 42       |         | Apt Elev | 775  |


LOC/DME RWY 23

GREATER CUMBERLAND RGNL (CBE)

When local altimeter setting not received, use Winchester altimeter setting and increase all MDA 100 feet, increase S-23 Cat B visibility ¼ mile, Cats C and D ½ mile. Night landing: Rwy 5, 11, 29 NA. Circling NA northwest of Rwy 5/23. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing left turn to 5000 on heading 175° and on ESL VOR/DME R-046 to KEYER/ESL 18.8 DME and hold, continue climb-in-hold to 5000.

|         |                     |                |
|---------|---------------------|----------------|
| AWOS-3  | JOHNSTOWN APP CON ★ | UNICOM         |
| 128.625 | 121.2 299.2         | 122.8 (CTAF) 0 |

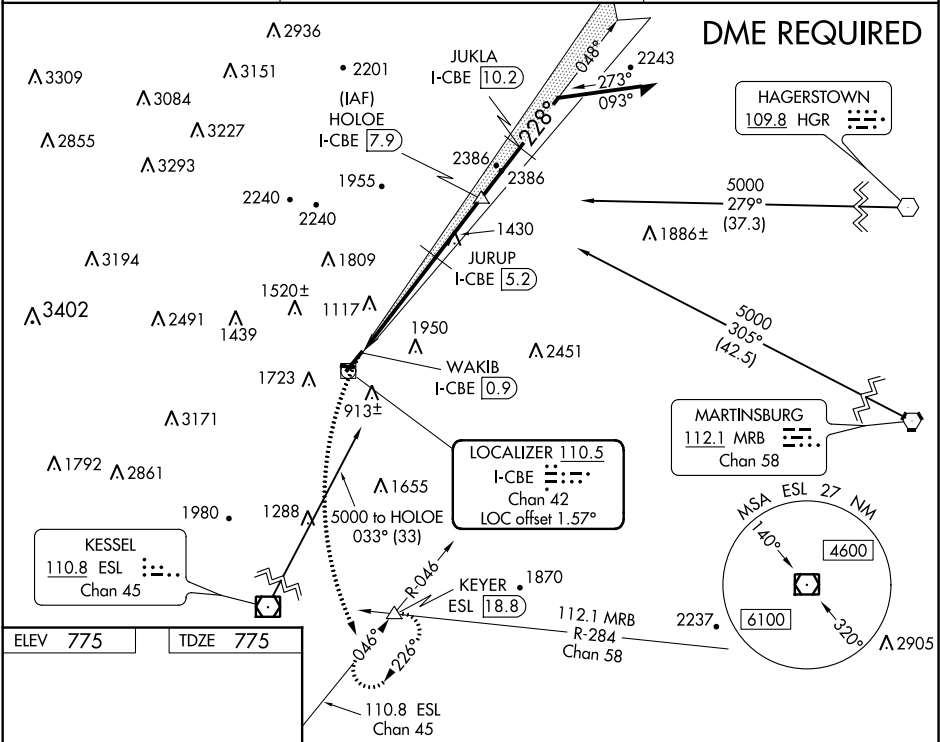

ELEV 775 TDZE 775

REIL Rwy 23 0  
LIRL Rwy 11-29 0  
HIRL Rwy 5-23 0

|          |                                                                  |                         |                      |                      |
|----------|------------------------------------------------------------------|-------------------------|----------------------|----------------------|
|          | 5000<br>hdg 175°                                                 | KEYER<br>ESL R-046<br>△ | HOLOE<br>I-CBE 7.9   | Remain within 10 NM  |
|          | VGSI and descent angles not coincident (VGSI Angle 3.59/TCH 29). |                         |                      |                      |
|          | WAKIB I-CBE 0.9 JURUP I-CBE 5.2 JUKLA I-CBE 10.2                 |                         |                      |                      |
|          | 2420 3400 3800 4300                                              |                         |                      |                      |
|          | 4.3 NM 2.7 NM 2.3 NM                                             |                         |                      |                      |
| CATEGORY | A                                                                | B                       | C                    | D                    |
| S-23     | 1680-1¼ 905 (1000-1¼)                                            | 1680-2½ 905 (1000-2½)   |                      |                      |
| CIRCLING | 1680-1¼ 905 (1000-1¼)                                            | 2140-1½ 1365 (1400-1½)  | 2260-3 1485 (1500-3) | 2360-3 1585 (1600-3) |