
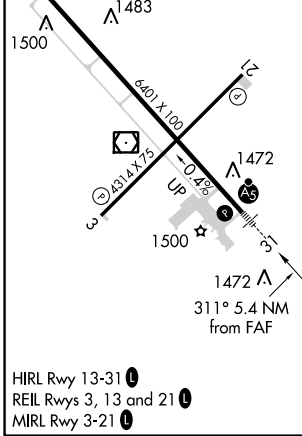


LOC I-VKE <b>108.7</b>	APP CRS <b>311°</b>	Rwy Idg TDZE Apt Elev	<b>6401</b> <b>1450</b> <b>1470</b>
---------------------------	------------------------	-----------------------------	---

# ILS or LOC/DME RWY 31

DEVILS LAKE RGNL (DVL)

<p><b>NA</b> When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet and all MDA 80 feet and increase S-LOC 31 Cat C/D and Circling Cat C/D visibility 1/4 mile. For inop MALSRS when using Cando altimeter setting, increase S-ILS 31 all Cats visibility to 2/8 mile and S-LOC 31 Cat C/D to 1/2 mile. DME from DVL VOR/DME. Simultaneous reception of I-VKE and DVL DME required.</p>	<p>MALSRS</p>	<p>MISSED APPROACH: Climb to 3200 then left turn direct DVL VOR/DME and hold.</p>
<p>AWOS-3PT <b>125.875</b></p>	<p>MINNEAPOLIS CENTER <b>124.2 270.3</b></p>	<p>UNICOM <b>122.8 (CTAF)</b></p>

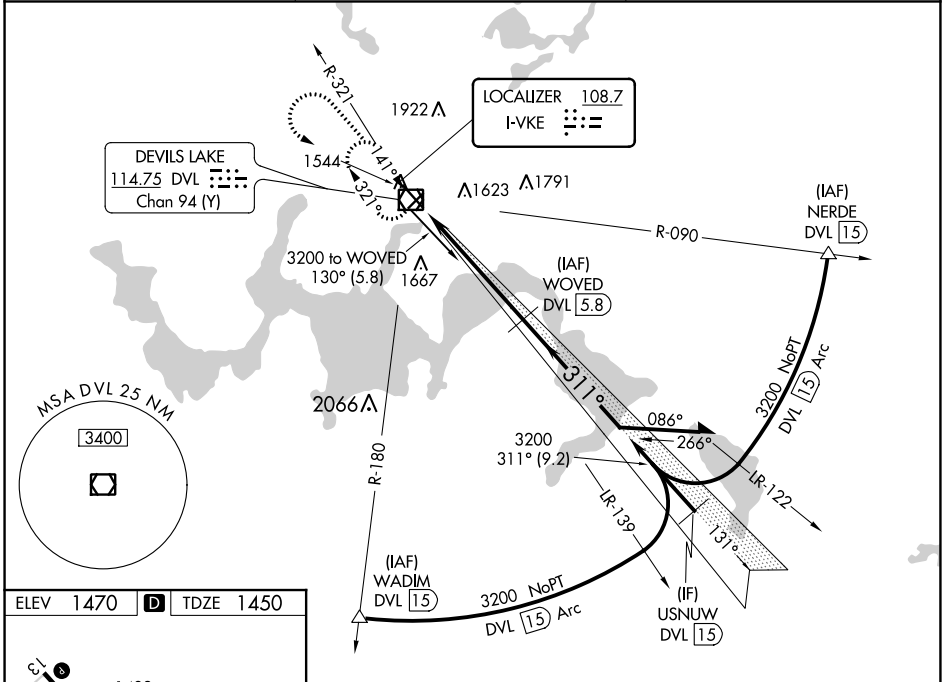

<p>3200</p> <p>DVL</p> <p>WOVED DVL 5.8</p> <p>Remain within 10 NM</p>	<p>*LOC only.</p> <p>DVL 0.5</p> <p>*DVL 1.8</p> <p>3200</p> <p>131°</p> <p>311°</p> <p>3200</p> <p>3200</p> <p>GS 3.00°</p> <p>TCH 44</p>			
CATEGORY	A	B	C	D
S-ILS 31		1650-1/2	200 (200-1/2)	
S-LOC 31		1780-1/2	330 (400-1/2)	
<b>C</b> CIRCLING	2000-1	530 (600-1)	2240-2 1/4 770 (800-2 1/4)	2240-2 1/2 770 (800-2 1/2)

NC-1, 08 SEP 2022 to 06 OCT 2022

NC-1, 08 SEP 2022 to 06 OCT 2022