
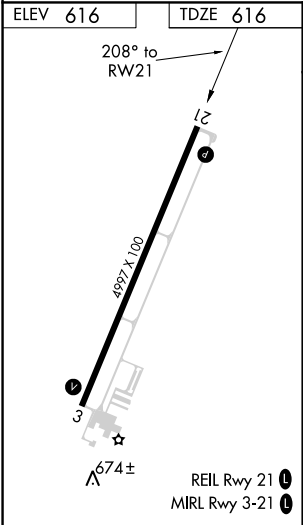


WAAS CH 86707 W21A	APP CRS 208°	Rwy Idg TDZE 616 Apt Elev 616	4997
--	------------------------	---	-------------

RNAV (GPS) RWY 21
CUSTER (TTF)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). When local altimeter setting not received, use Detroit Metro Wayne County altimeter setting and increase LPV DA 43 feet and all visibilities ¼ SM, LNAV/VNAV DA 138 feet and all visibilities ½ SM and all MDA 60 feet and Cat C visibilities ¼ SM. Baro-VNAV and VDP NA when using Detroit Metro Wayne County altimeter setting.	MISSED APPROACH: Climb to 3000 direct CIVIK and on track 118° to GAKRE and on track 031° to MACCS and hold.
--	--

AWOS-3 119.075	DETROIT APP CON 134.3 363.2	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

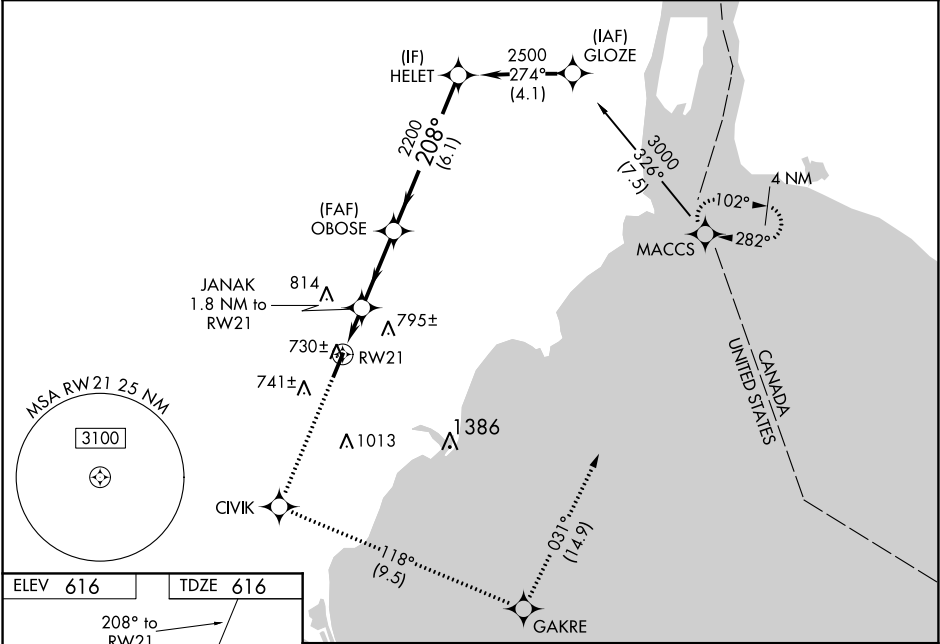

3000	CIVIK	tr 118°	GAKRE	tr 031°	MACCS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 49).		HELET
* LNAV only.		JANAK 1.8 NM to RW21		OBOSE 2200		208°		2500
RW21		*0.9 NM to RW21		*1220		2200		GP 3.00° TCH 42
0.9 NM		0.9 NM		3 NM		6.1 NM		
CATEGORY	A		B		C		D	
LPV DA	966-1¼ 350 (400-1¼)							
LNAV/VNAV DA	1009-1½ 393 (400-1½)							
LNAV MDA	980-1 364 (400-1)						980-1¼ 364 (400-1¼)	
CIRCLING	1120-1 504 (600-1)		1180-1 564 (600-1)		1180-1½ 564 (600-1½)		1180-2 564 (600-1)	