

WAAS CH 60903 W28A	APP CRS 285°	Rwy Idg TDZE 967 Apt Elev 968
--	------------------------	---

RNAV (GPS) RWY 28

STATESVILLE RGNL (SVH)

▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lincolnton altimeter setting and increase LPV DA to 1218, LNAV/VNAV DA to 1269, and all MDA 60 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ½ , and Circling Cat C ¼ mile. VDP and Baro-VNAV NA when using Lincolnton altimeter setting. For inop MALS, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to ¾ mile. For inop MALS when using Lincolnton altimeter setting, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 1 mile.

MALS




MISSED APPROACH:
Climb to 1380 then
climbing right turn
to 3400 direct
SANFI and hold.

AWOS-3 119.225	ATLANTA CENTER 125.15 263.0	UNICOM 123.075 (CTAF) ①
--------------------------	---------------------------------------	-----------------------------------

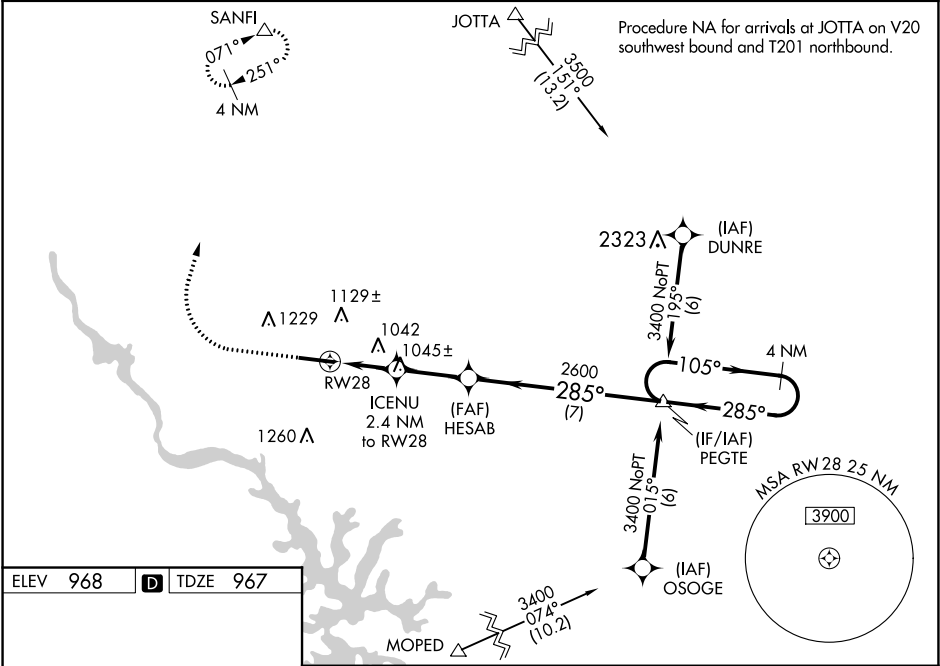

ELEV 968	D	TDZE 967
----------	----------	----------

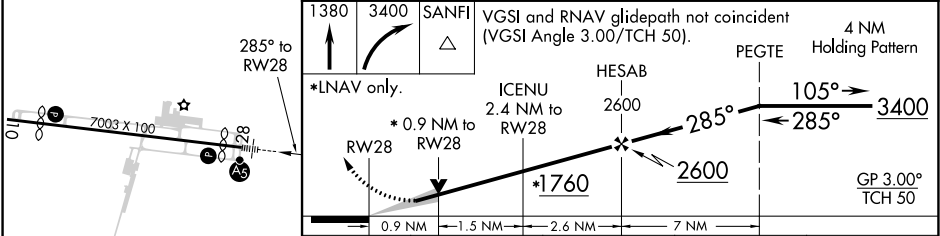

CATEGORY	A	B	C	D
LPV DA		1167-¾	200 (200-¾)	
LNAV/ VNAV DA		1218-¾	251 (300-¾)	
LNAV MDA		1300-¾	333 (400-¾)	
C CIRCLING	1420-1 452 (500-1)	1540-1 572 (600-1)	1540-1½ 572 (600-1½)	1560-2 592 (600-2)