

WAAS CH <b>70518</b> <b>W35A</b>	APP CRS <b>350°</b>	Rwy Idg TDZE <b>1135</b> Apt Elev <b>1137</b>
--	------------------------	---

# RNAV (GPS) RWY 35


HAMILTON MUNI (VGC)

**RNP APCH.**


**▼** Baro-VNAV and VDP NA when using Syracuse altimeter setting. Rwy 35 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 50°C. When local altimeter setting not received, use Syracuse altimeter setting and increase LPV DA to 1748, LNAV/VNAV DA to 2164 and all MDA 180 feet; increase LPV visibility to 1 3/4 SM and LNAV Cat A/B visibility to 1 1/2 SM and Cat C visibility to 2 1/2 SM.

**▲ NA** MISSED APPROACH: Climb to 3500 direct KREMM and hold.

AWOS-3P <b>119.425</b>	SYRACUSE APP CON <b>126.125 269.125</b>	UNICOM <b>123.0</b> (CTAF)	<b>122.7</b> <b>0</b>
---------------------------	--	-------------------------------	-----------------------

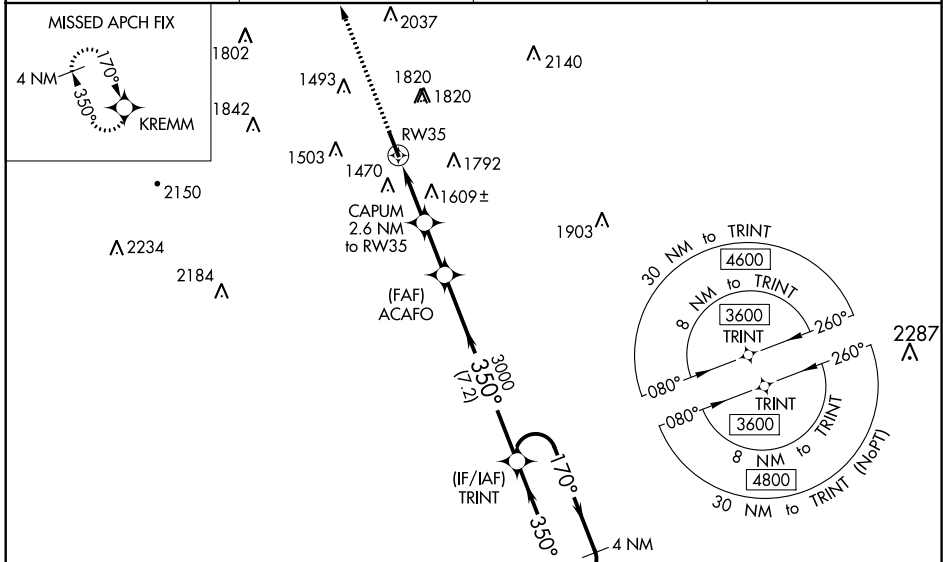

ELEV <b>1137</b>	<b>D</b>	TDZE <b>1135</b>
------------------	----------	------------------

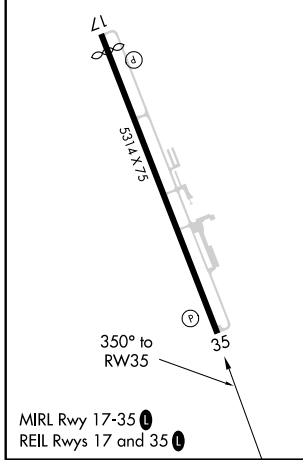

3500 KREMM	VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 40).	TRINT	4 NM Holding Pattern
*LNAV only	CAPJUM 2.6 NM to RW35	ACFAFO 3000	6000 3600
RW35	*1.6 NM to RW35	*2200	GP 3.77° TCH 40
	1.6 NM	1 NM	2 NM
			7.2 NM

CATEGORY	A	B	C	D
LPV DA	1581-1 3/8 446 (500-1 3/8)			NA
LNAV/VNAV DA	1997-4 862 (900-4)			NA
LNAV MDA	1860-1	725 (800-1)	1860-2 725 (800-2)	NA
<b>C</b> CIRCLING	2040-1 1/4 903 (1000-1 1/4)	2120-1 1/2 983 (1000-1 1/2)	2340-3 1203 (1300-3)	NA

NE-2, 08 SEP 2022 to 06 OCT 2022

NE-2, 08 SEP 2022 to 06 OCT 2022