

WAAS CH 81923 W18A	APP CRS 174°	Rwy Idg 5001 TDZE 1177 Apt Elev 1193
--	------------------------	---

RNAV (GPS) RWY 18

SUNDANCE (HSD)


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Wiley Post altimeter setting. DME/DME RNP-0.3 NA. Circling Rwy 36 NA at night.

MISSED APPROACH:
Climb to 3200 direct NUFAD and hold.

AWOS-3 120.975	OKE CITY APP CON 124.6 266.8	CLNC DEL 123.7	UNICOM 122.7 (CTAF) 0
--------------------------	--	--------------------------	---------------------------------

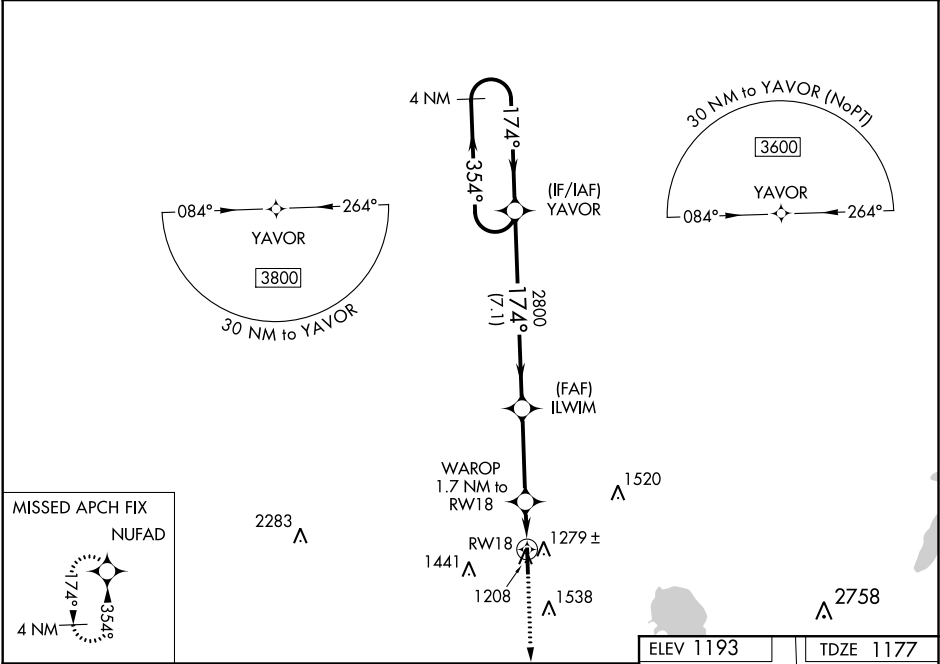

MISSED APCH FIX NUFAD		ELEV 1193		TDZE 1177	
4 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 30).		3200 NUFAD	
3600		ILWIM		WAROP 1.7 NM to RW18	
GP 3.00° TCH 40		2800		*1.1 NM to RW18	
7.1 NM		3.4 NM		0.6	
CATEGORY	A	B	C	D	
LPV DA	1427-1	250 (300-1)		NA	
LNAV/VNAV DA	1473-1½	296 (300-1½)		NA	
LNAV MDA	1540-1	363 (400-1)	1540-1½ 363 (400-1½)	NA	
CIRCLING	1740-1 547 (600-1)	1840-1 647 (700-1)	1840-1¾ 647 (700-1¾)	NA	

MIRL Rwy 18-36 0