


LOC/DME I-URD	APP CRS	Rwy Idg	7001
110.5	224°	TDZE	12
Chan 42		Apt Elev	21

ILS or LOC RWY 22

LAGUARDIA (LGA)

RADAR required for procedure entry. RADAR or DME required for LOC only.				ALSIF-1	MISSED APPROACH: Climb to 3000 on LGA VOR/DME R-225 to PROUD INT/LGA 11 DME and hold, continue climb-in-hold to 3000.	
D-ATIS ARR	125.95	NEW YORK APP CON		LAGUARDIA TOWER	GND CON	CLNC DEL
D-ATIS DEP	127.05	120.8 263.0		118.7 263.0	121.7 263.0	135.2
				CPDLC		

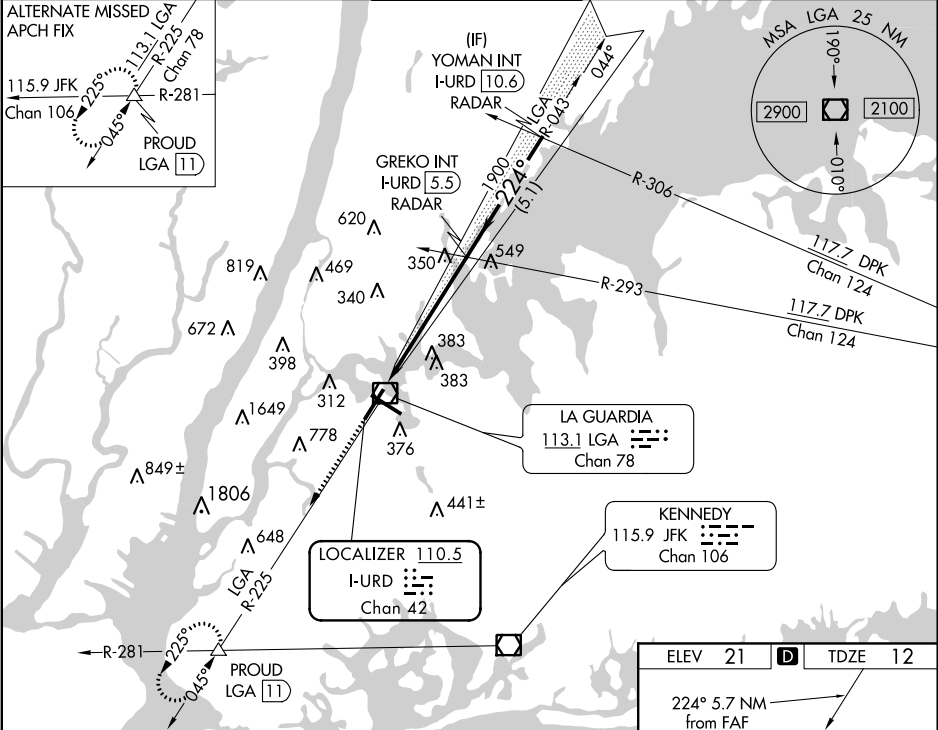

3000	PROUD	VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 67).	
LGA R-225			
* LOC only			
I-URD DME ANTENNA		GREKO INT I-URD 5.5	YOMAN INT I-URD 10.6
I-URD 0.2	* I-URD 1.5	1900	224° 3000
		GS 3.00° TCH 52	
1.6 NM		4.1 NM	5.1 NM
CATEGORY	A	B	C
S-ILS 22	212/18		200 (200-1/2)
S-LOC 22	600/24 588 (600-1/2)		600-1 1/4 588 (600-1 1/4)
CIRCLING	700-1 679 (700-1)		1080-3 1260-3
			1059 (1100-3) 1239 (1300-3)

