

ILS or LOC RWY 23L  
RALEIGH-DURHAM INTL (RDU)



MALSR

**MISSED APPROACH:** Climb to 1100 then climbing left turn to 2600 on heading 050° and RDU VORTAC R-092 to ZEBUL INT and hold.

**T** Simultaneous approach authorized. For inop ALS, increase S-ILS 23L all  
**A** Cats visibility to RVR 5500. Localizer unusable for coupled approaches  
below 1100 or within 2 NM of threshold.

|        |                 |                                       |                           |                                      |                           |
|--------|-----------------|---------------------------------------|---------------------------|--------------------------------------|---------------------------|
| D-ATIS | RALEIGH APP CON | (EAST) RALEIGH TOWER (WEST)           | (EAST) GND CON (WEST)     | CLNC DEL                             | CPDLC                     |
| 123.8  | 127.675 307.9   | 127.45 257.8<br>Rwys 5R-23L and 14-32 | 119.3 257.8<br>Rwy 5L-23R | 121.9 348.6<br>Rwys 5R-23L and 14-32 | 121.7 348.6<br>Rwy 5L-23R |
|        |                 |                                       |                           | 120.1                                |                           |

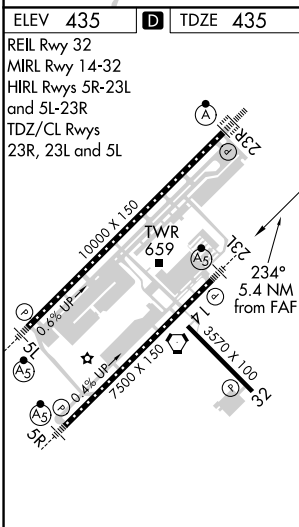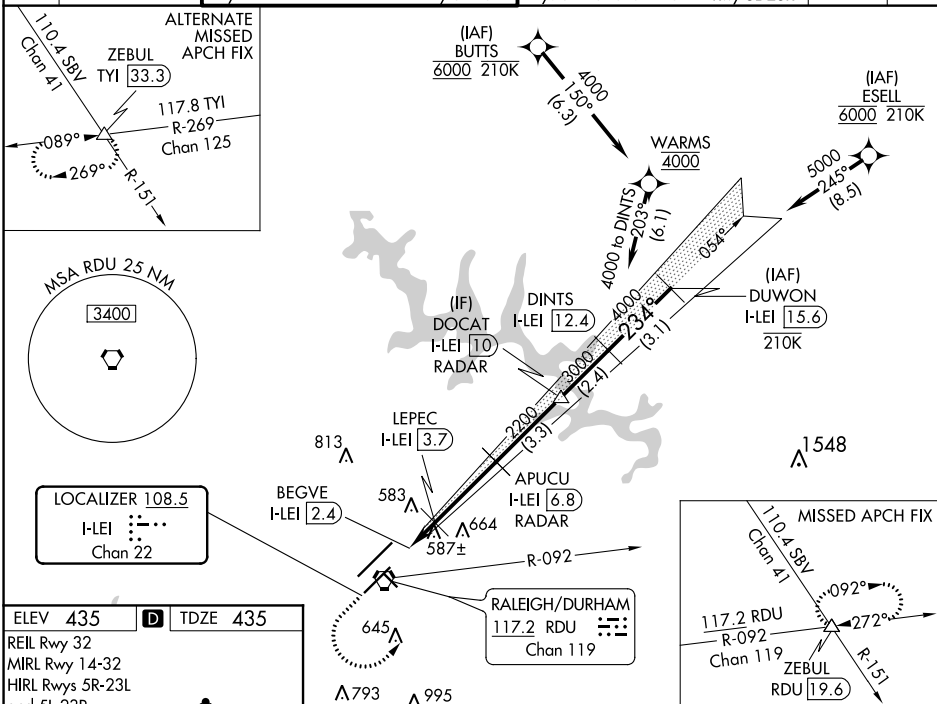

|            |                     |              |            |                                                 |                   |                         |                         |
|------------|---------------------|--------------|------------|-------------------------------------------------|-------------------|-------------------------|-------------------------|
| 1100<br>↑  | 2600<br>hdg<br>050° | RDU<br>R-092 | ZEBUL<br>△ | Localizer unusable from<br>1 NM from threshold. |                   | DUWON<br>I-LEI 15.6     |                         |
| *LOC only. |                     |              |            | APUCU<br>I-LEI 6.8                              | DOCAT<br>I-LEI 10 | DINTS<br>I-LEI 12.4     | 5000                    |
|            |                     |              |            | LEPEC<br>I-LEI 3.7                              | 2200              | 4000                    | GS 3.00°<br>TCH 56      |
|            |                     |              |            | 2200                                            | 3000              | 4000                    | 5000                    |
| CATEGORY   |                     |              |            | A                                               | B                 | C                       | D                       |
| S-ILS 23L  |                     |              |            | 806/35                                          | 371 (400-¾)       |                         |                         |
| S-LOC 23L  |                     |              |            | 840/40                                          | 405 (500-¾)       |                         |                         |
| C CIRCLING |                     |              |            | 960-1¼                                          | 525 (600-1¼)      | 1020-1½<br>585 (600-1½) | 1180-2½<br>745 (800-2½) |

SE-2, 03 NOV 2022 to 01 DEC 2022