

WAAS
CH **82312**
W09A

APP CRS
089°

Rwy Idg
TDZE
Apt Elev

5000
910
912

RNAV (GPS) RWY 9


ANOKA COUNTY/BLAINE (JANES FLD) (A.N.E.)

RNP APCH - GPS.

When local altimeter setting not received, use Crystal altimeter setting: increase LPV DA to 1246 feet and all visibilities $\frac{1}{8}$ SM; increase LNAV/VNAV DA to 1373 feet; increase all MDA 40 feet and LNAV Cat C/D visibility $\frac{1}{8}$ SM and Circling Cat D visibility $\frac{1}{2}$ SM. Baro-VNAV and VDP NA when using Crystal altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3100 direct JUDAL and hold.

ATIS 120.625	MINNEAPOLIS APP CON 126.5 335.65	ANOKA TOWER★ 132.4 (CTAF) 0	GND CON 121.85	CLNC DEL 121.3	MINNEAPOLIS CLNC DEL 121.85 (When tower closed)	UNICOM 122.95
------------------------	--	--	--------------------------	--------------------------	--	-------------------------

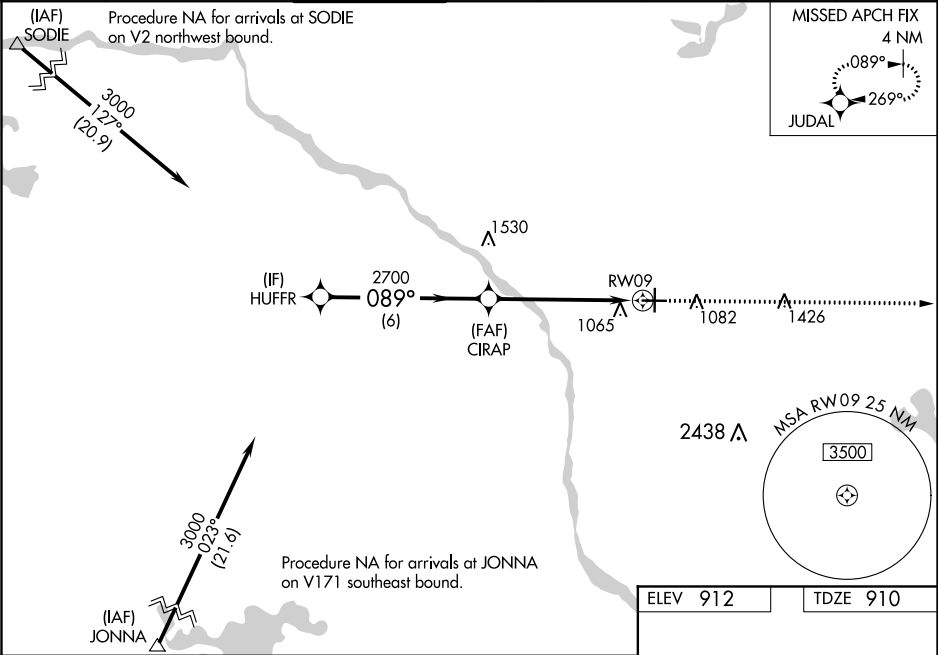

HUFFR

3000

089°

GP 3.00°
TCH 40

6 NM

CIRAP

2700

4.2 NM

RW09

1.3 NM

3100

JUDAL

* 1.3 NM to RW09

* LNAV only.

CATEGORY	A	B	C	D
LPV DA	1225-7⁄8 315 (400-7⁄8)			
LNAV/VNAV DA	1352-13⁄8 442 (500-13⁄8)			
LNAV MDA	1340-1 430 (500-1)	1340-1¼ 430 (500-1¼)		
CIRCLING	1400-1 488 (500-1)	1460-1½ 548 (600-1½)	1580-2 668 (700-2)	

ELEV 912

TDZE 910

HIRL Rwy 9-27 **0**
MIRL Rwy 18-36 **0**
REIL Rws 9, 18 and 36 **0**