

APP CRS 348°	Rwy Idg TDZE Apt Elev	6004 360 364
------------------------	-----------------------------	---



RNAV (GPS) RWY 35
MOUNT PLEASANT RGNL (OSA)

T 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use
A Paris altimeter setting and increase all DA/MDA 120 feet, increase LNAV/VNAV
visibilities ½ mile all Cats, LNAV visibilities ½ mile all Cats and circling visibilities ¼ mile
all Cats. VDP and Baro-VNAV NA when using Paris altimeter setting.

MISSED APPROACH: Climb to 2000 direct AVORE and hold.

AWOS-3 119.775	FORT WORTH CENTER 132.025 360.75	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

MISSED APCH FIX
4 NM
168°
348°
AVORE

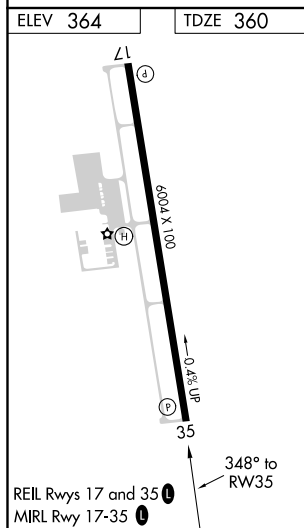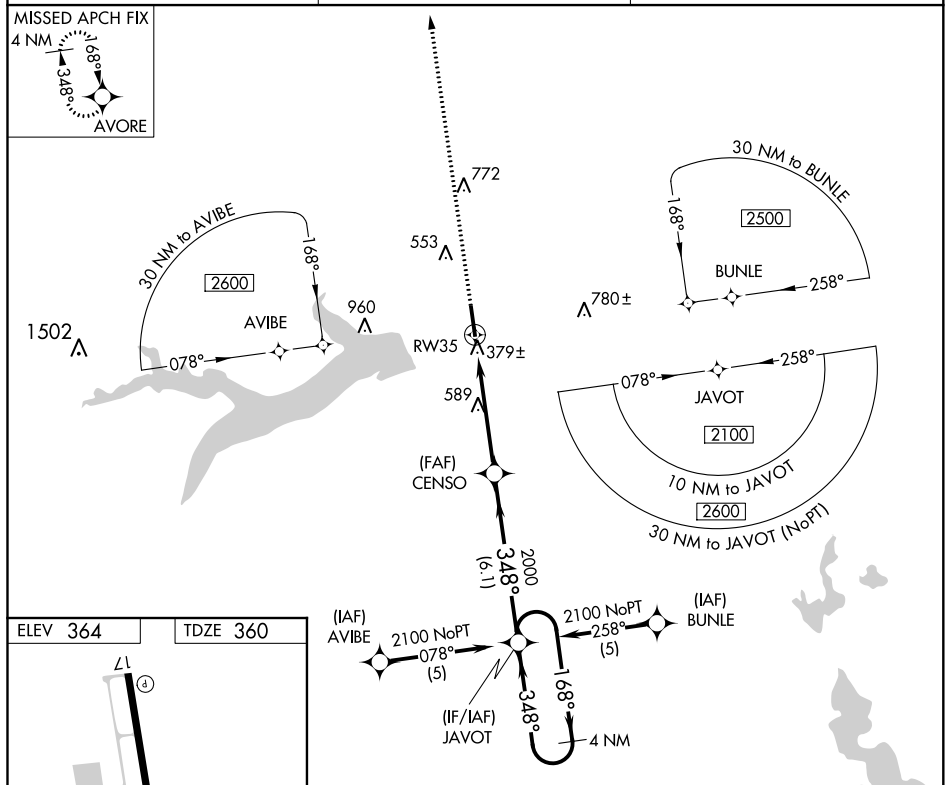

2000 *LNAV only. AVORE *1.6 NM to RW35	CENSO 2000 JAVOT 2100 1.6 3.4 NM 6.1 NM			4 NM Holding Pattern 168° ← 348°																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 15%;">CATEGORY</th> <th style="width: 30%;">A</th> <th style="width: 30%;">B</th> <th style="width: 25%;">C</th> <th style="width: 20%;">D</th> </tr> <tr> <td>LNAV/DA</td> <td colspan="4" style="text-align: center;">700-1¼ 340 (400-1¼)</td> </tr> <tr> <td>LNAV MDA</td> <td colspan="2" style="text-align: center;">900-1 540 (600-1)</td> <td style="text-align: center;">900-1½ 540 (600-1½)</td> <td style="text-align: center;">900-1¾ 540 (600-1¾)</td> </tr> <tr> <td>CIRCLING</td> <td colspan="2" style="text-align: center;">900-1 536 (600-1)</td> <td style="text-align: center;">1040-2 676 (700-2)</td> <td style="text-align: center;">1040-2¼ 676 (700-2¼)</td> </tr> </table>	CATEGORY	A	B	C	D	LNAV/DA	700-1¼ 340 (400-1¼)				LNAV MDA	900-1 540 (600-1)		900-1½ 540 (600-1½)	900-1¾ 540 (600-1¾)	CIRCLING	900-1 536 (600-1)		1040-2 676 (700-2)	1040-2¼ 676 (700-2¼)	GP 3.00° TCH 44			
CATEGORY	A	B	C	D																				
LNAV/DA	700-1¼ 340 (400-1¼)																							
LNAV MDA	900-1 540 (600-1)		900-1½ 540 (600-1½)	900-1¾ 540 (600-1¾)																				
CIRCLING	900-1 536 (600-1)		1040-2 676 (700-2)	1040-2¼ 676 (700-2¼)																				