ATIS
119.4 270.1
CLNC DEL
125.675 305.2
BIRMINGHAM TOWER
119.9 317.725

TOP ALTITUDE: 4000

NOTE: RADAR required.
NOTE: Use frequency depicted within sector where FIX/NAVAID for your route is located.

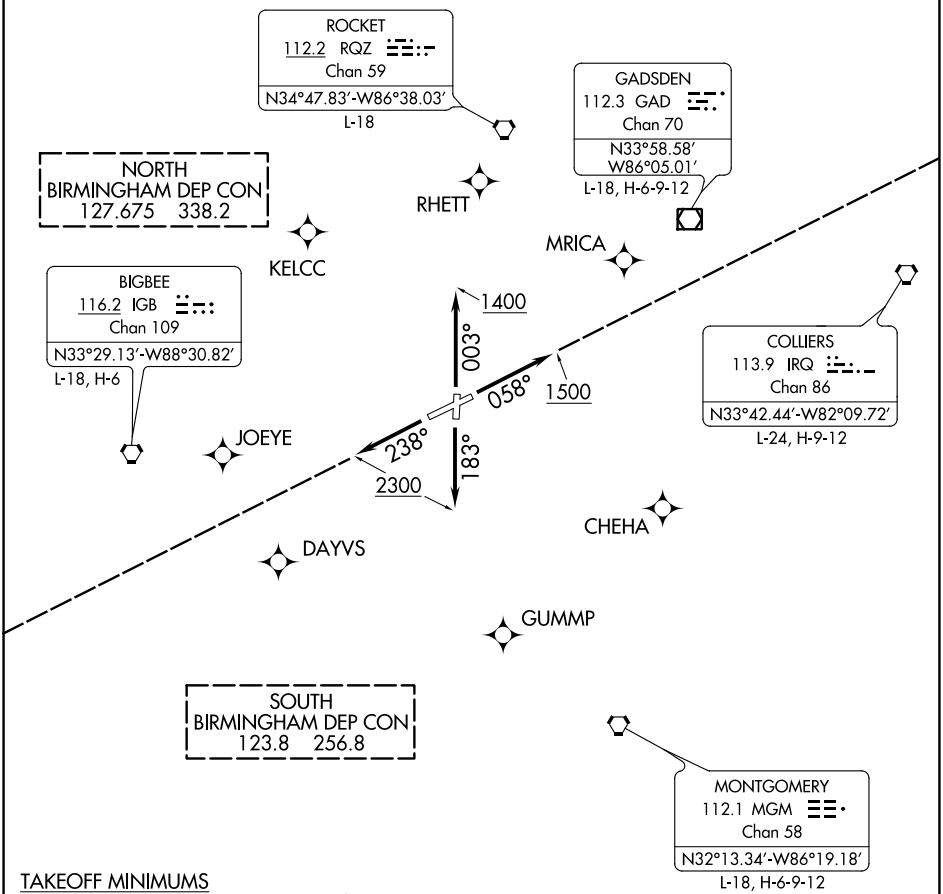

TAKEOFF MINIMUMS
Rwy 6: 300-2 with minimum climb of 285' per NM to 1800 or standard with minimum climb of 435' per NM to 1300.
Rwy 18: 600-3 with minimum climb of 225' per NM to 1300 or standard with minimum climb of 455' per NM to 1500.
Rwy 24: Standard with minimum climb of 280' per NM to 1400.
Rwy 36: 300-2¼ or standard with minimum climb of 565' per NM to 1000.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-4, 01 DEC 2022 to 29 DEC 2022
SE-4, 01 DEC 2022 to 29 DEC 2022