

WAAS CH 90105 W21A	APP CRS 206°	Rwy Idg TDZE 1486 Apt Elev 1503
--	------------------------	---

RNAV (GPS) RWY 21
ALTOONA/BLAIR COUNTY (A00)



RNP APCH.

▼ Baro-VNAV NA when using Bedford County altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inoperative ALS, increase LPV visibility all Cats to 1½ SM. For inoperative ALS when using Bedford County altimeter setting, increase LPV and LNAV/VNAV all Cats visibility to 2 SM and increase LNAV Cats C/D visibility to 2 ½ SM. When local altimeter setting not received, use Bedford County altimeter setting; increase all DA 84 feet and all MDA 100 feet. Increase all LPV and LNAV/VNAV visibilities ¾ SM, LNAV Cats B, C and D and Circling Cat A ¼ SM. Circling Rwy 3, 12, 30 NA at night.

MALS

MISSED APPROACH:
Climb to 5000 direct YOLUP and on track 223° to CRYSS and hold, continue Climb-in-hold to 5000.

ASOS 127.125	JOHNSTOWN APP CON ★ 121.2 299.2	CTAF 123.60	UNICOM 123.0
------------------------	---	-----------------------	------------------------

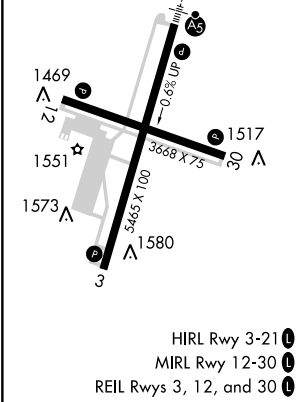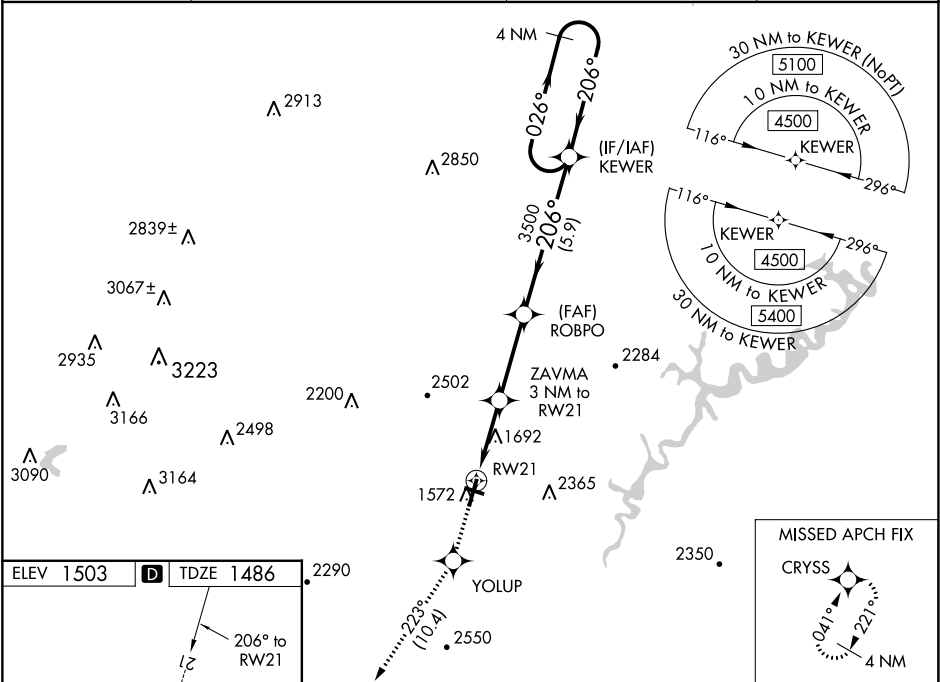

5000	YOLUP	CRYSS	4 NM Holding Pattern				
↑	✧	tr 223°	✧				
*LNAV only							
*2 NM to RW21							
ZAVMA 3 NM to RW21							
*2460							
3500							
206°							
026°							
4500							
GP 3.00° TCH 52							
CATEGORY		A		B		C	D
LPV	DA	1977-1⅛		491 (500-1⅛)			
LNAV/VNAV	DA	1999-1¼		513 (500-1¼)			
LNAV	MDA	2160-½	674 (700-½)	2160-½		674 (700-½)	
CIRCLING	2240-1	2240-1¼	2800-3	2840-3			
	737 (800-1)	737 (800-1¼)	1297 (1300-3)	1337 (1400-3)			

NE-4, 01 DEC 2022 to 29 DEC 2022

NE-4, 01 DEC 2022 to 29 DEC 2022