

WAAS CH 48904 W10A	APP CRS 093°	Rwy Idg 12246 TDZE 672 Apt Elev 680
--	------------------------	--

RNAV (GPS) RWY 10L
CHICAGO O'HARE INTL (ORD)


RADAR required for procedure entry: RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 4000 direct XURXU and on track 161° to CGT VORTAC and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 132.7 348.0	124.125 GND CON (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (TWR CENTER) (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	--	------------------------------------	--	--	--------------------------	-------

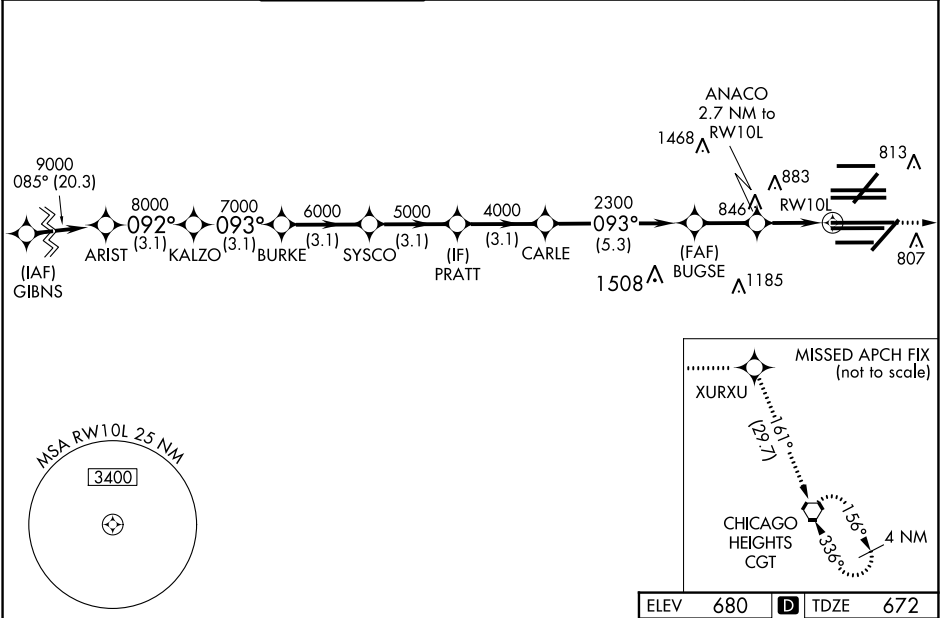

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).

4000 XURXU tr 161° CGT

* LNAV only.

GP 3.00° TCH 56

ARIST KALZO BURKE SYSCO PRATT CARLE BUGSE ANACO

9000 092° 8000 093° 7000 6000 5000 4000 2300 1580

3.1 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM 5.3 NM 2.2 NM 1.5 1.2

CATEGORY	A	B	C	D
LPV DA	872/18		200 (200-½)	
LNAV/VNAV DA	1062/35		390 (400-¾)	
LNAV MDA	1120/24	448 (500-½)	1120/45	448 (500-¾)

ELEV 680 D TDZE 672

HIRL all Rwy's
TDZ/CL all Rwy's except 4L

EC-3, 01 DEC 2022 to 29 DEC 2022

EC-3, 01 DEC 2022 to 29 DEC 2022