

ROANOKE, VIRGINIA

AL-349 (FAA)

22027

WAAS CH 70722 W34A	APP CRS 336°	Rwy Idg 5810 TDZE 1160 Apt Elev 1175
--	------------------------	---

RNAV (GPS) Y RWY 34

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

RNP APCH.			MALSR 	MISSED APPROACH: (Do not exceed 240K until PROSE) Climb to 2800 then climbing right turn to 6000 direct PROSE and hold, continue climb-in-hold to 6000. # Missed approach requires minimum climb of 405 feet per NM to 3900.		
  -13°C	Circling NA northwest of Rwy 6-24. Rwy 34 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. Inop table does not apply to LPV, LNAV/VNAV or LNAV Cat C/D. For inop ALS, increase LPV# all Cats visibility to 1½ SM.					
ATIS 132.375	ROANOKE APP CON 126.9 339.8		ROANOKE TOWER 118.3 257.8		GND CON 121.9 257.8	CLNC DEL 119.7

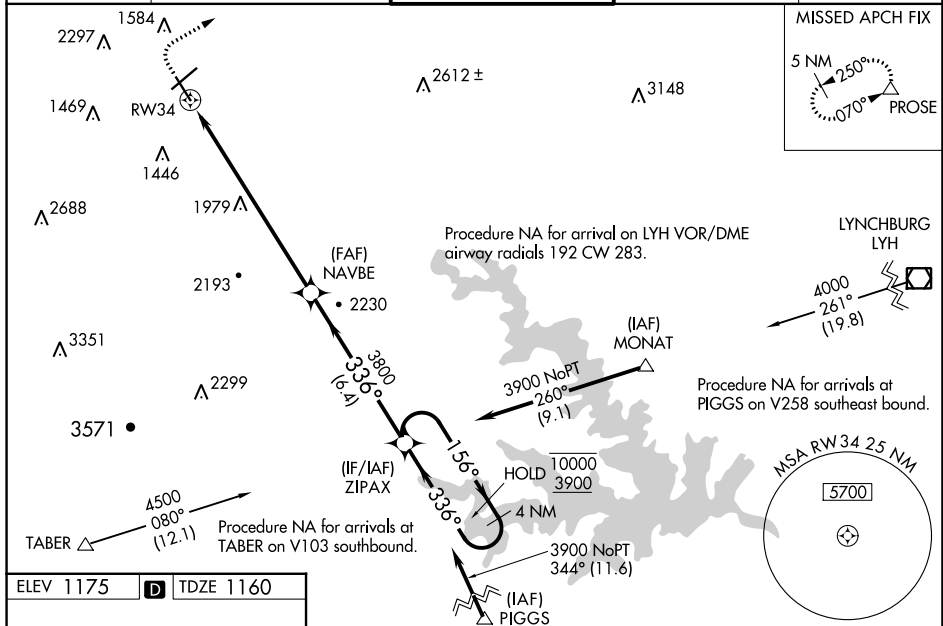


Diagram illustrating a 4 NM Holding Pattern for RW34. The pattern is defined by the following parameters:

- Pattern Type:** 4 NM Holding Pattern
- Altitudes:** 10000, 3900, 3800, 2640-3, 2640-1, 2640-3, 2820-3
- Distances:** 4.5 NM, 3.7 NM, 6.4 NM
- Angles:** 336°, 156°, 336°
- Waypoints:** RW34, NAVBE, ZIPAX

CATEGORY	A	B	C	D
LPV DA #	1560-3/4	400 (400-3/4)		
LPV DA	2568-5	1408 (1400-5)		
LNAP/VNAV DA	2300-4	1140 (1200-4)		
LNAP MDA	2640-3/4 1480 (1500-3/4)	2640-1 1480 (1500-1)	2640-3 1480 (1500-3)	
CIRCLING	2640-1 1/4 1465 (1500-1 1/4)	2640-1 1/2 1465 (1500-1 1/2)	2640-3 1465 (1500-3)	2820-3 1645 (1700-3)

ROANOKE, VIRGINIA

Amdt 2 15AUG19

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

37°20'N-79°59'W

RNAV (GPS) Y RWY 34

NE-3, 01 DEC 2022 to 29 DEC 2022