

WAAS CH 69411	APP CRS 298°	Rwy Idg TDZE 22	7276
W30A		Apt Elev 24	

RNAV (GPS) RWY 30L

VERO BEACH RGNL (VRB)


▼

▲

Circling to Rwy 30R NA at night. Baro-VNAV NA when using Fort Pierce altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA when using Fort Pierce altimeter setting. When local altimeter setting not received, use Fort Pierce altimeter setting and increase all DA 23 feet and all MDA 40 feet and increase LNAV/VNAV all Cats visibility 1⁄8 mile LNAV Cats C/D and Circling visibility Cats C/D 1⁄4 mile.

MISSED APPROACH:
Climb to 2000 direct
HOCKI and hold.

ATIS 120.575	PALM BEACH APP CON 123.625 225.4	VERO BEACH TOWER ★ 126.3 (CTAF) 0	GND CON 127.45	CLNC DEL 134.975	UNICOM 122.95
------------------------	--	---	--------------------------	----------------------------	-------------------------

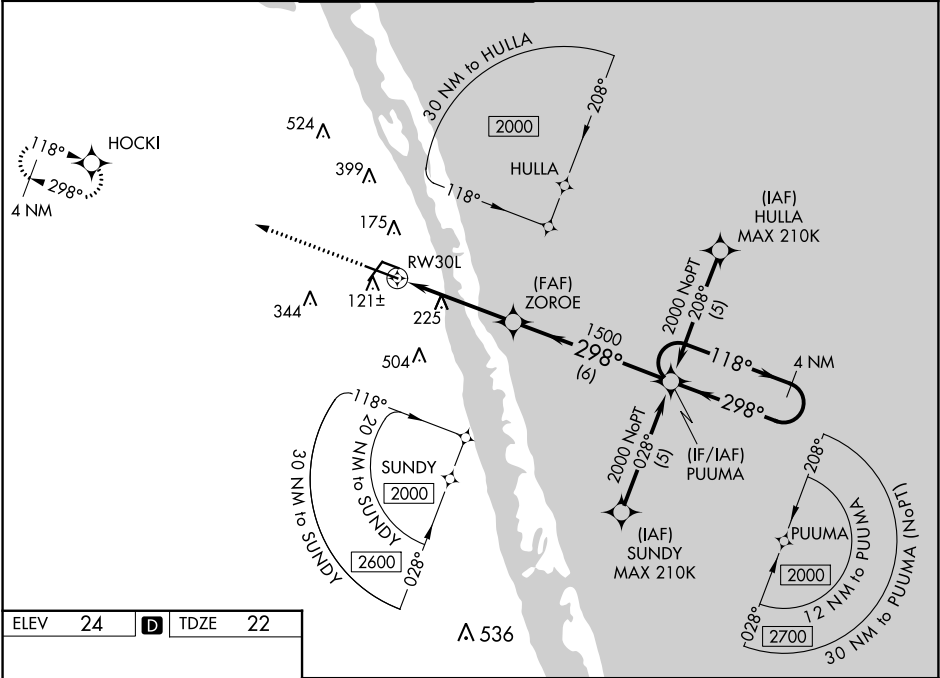

ELEV	24	D	TDZE	22
------	----	----------	------	----

MIRL Rwy 4-22, 12R-30L, and 12L-30R 0
REIL Rwy 4, 12R, 22 and 30L 0

2000 HOCKI *LNAV only. GP 3.00° TCH 58				
CATEGORY	A	B	C	D
LPV DA	222-3⁄4		200 (200-3⁄4)	
LNAV/VNAV DA	346-1		324 (400-1)	
LNAV MDA	540-1	518 (600-1)	540-1 3⁄8	518 (600-1 3⁄8)
CIRCLING	560-1	536 (600-1)	660-1 3⁄4 636 (700-1 3⁄4)	820-2 1⁄2 796 (800-2 1⁄2)

SE-3, 01 DEC 2022 to 29 DEC 2022

SE-3, 01 DEC 2022 to 29 DEC 2022