

WAAS CH 73020 W17A	APP CRS 174°	Rwy Idg TDZE Apt Elev	8600 470 470
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17L

TSTC WACO (CNW)

RNP APCH.

⚠

ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM.

MALS R

AS

MISSED APPROACH: Climb to 2300 direct OMOBE and hold.

AWOS-3PT 134.225	WACO APP CON ★ 127.65 227.125	TSTC TOWER ★ 124.0 (CTAF) 255.7	GND CON 121.7 0	UNICOM 122.95
----------------------------	---	---	---------------------------	-------------------------

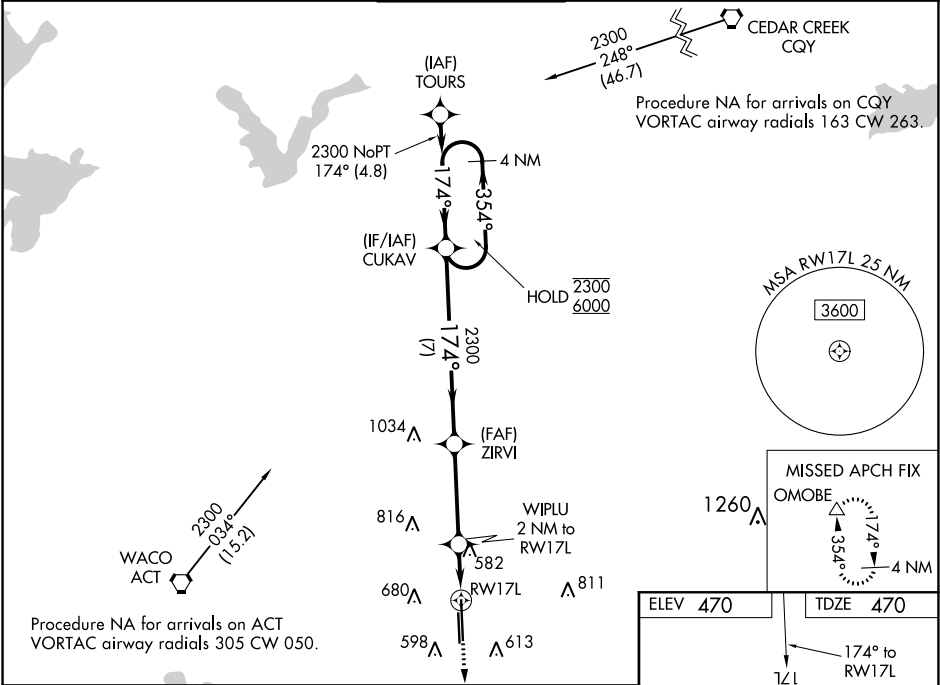

4 NM Holding Pattern		ZIRVI 2300		2300	OMOBE
6000 ← 354°		174° →		*LNAV only.	
2300		2300		*1 NM to RWY17L	
GP 3.00°		7 NM		RWY17L	
TCH 52		3.6 NM		1 NM	
1140		1 NM		1 NM	
CATEGORY	A	B	C	D	
LPV DA		670-½	200 (200-½)		
LNAV/VNAV DA		720-½	250 (300-½)		
LNAV MDA	840-½	370 (400-½)	840-⅝	370 (400-⅝)	
CIRCLING	940-1 470 (500-1)	1040-1 570 (600-1)	1040-1½ 570 (600-1½)	1120-2 650 (700-2)	

