

WAAS CH 63202 W16A	APP CRS 164°	Rwy Idg 11901 TDZE 432 Apt Elev 432
--	------------------------	--

RNAV (GPS) Y RWY 16L

SEATTLE-TACOMA INTL (SEA)


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 16R. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS, increase LPV all Cats visibility to RVR 4500, and increase LNAV Cats C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb direct CAVOB to cross CAVOB at or below 2000 then climb to 5000 on track 164° to MILLT and hold, continue climb-in-hold to 5000.

D-ATIS 118.0	SEATTLE APP CON 133.65 273.45	SEATTLE TOWER 119.9 239.3 (Rwys 16L, 16C, 34C, 34R) 120.95 239.3 (Rwys 16R, 34L)	GND CON 121.7	CLNC DEL 128.0	CPDLC
------------------------	---	--	-------------------------	--------------------------	-------

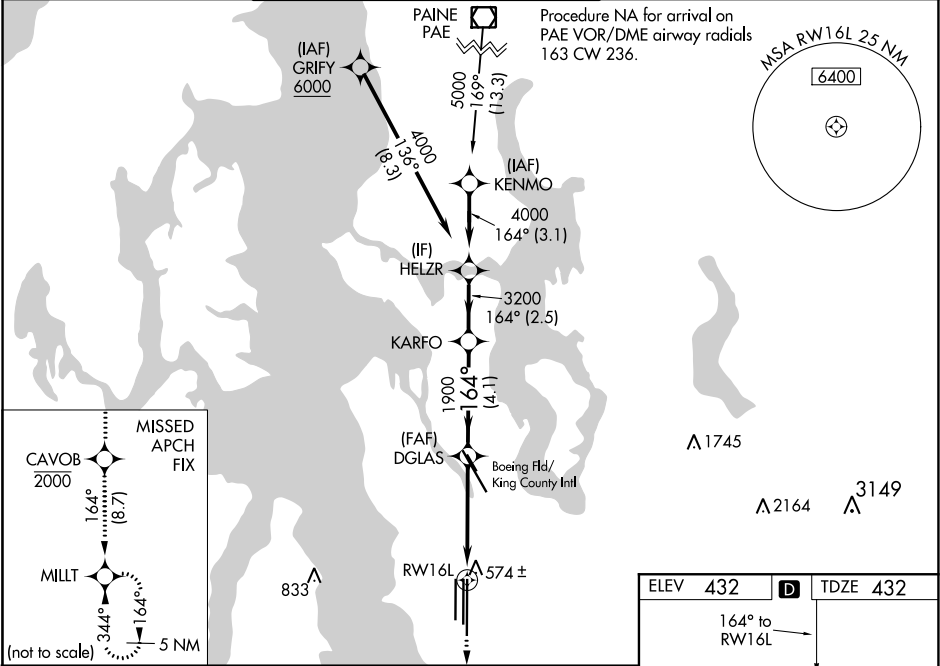


CAVOB 2000 MISSED APCH FIX
MILLT
(not to scale) 5 NM

↑ CAVOB 2000 tr 164° MILLT
*LNAV only *1 NM to RW16L

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).
DGLAS KARFO HELZR
1900 1900 4000 3200
RW16L GP 3.00° TCH 55

CATEGORY	A	B	C	D
LPV DA	700/24 268 (300-½)			
LNAV/ VNAV DA	766/32 334 (400-⅝)			
LNAV MDA	840/24 408 (500-½)	840/40 408 (500-¾)		
CIRCLING	1000-1 568 (600-1)	1000-1½ 568 (600-1½)		1000-2 568 (600-2)

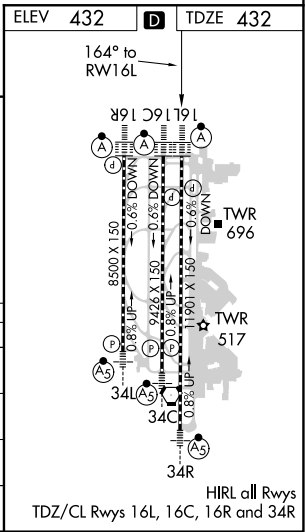

NW-1, 01 DEC 2022 to 29 DEC 2022

NW-1, 01 DEC 2022 to 29 DEC 2022