WAAS CH 42916 W02A	APP CRS 025°	Rwy ldg 5600 TDZE 559 Apt Elev 571

RNAV (GPS) RWY 2
DANVILLE RGNL (DAN)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to 1 SM. Increase LNAV Cats C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct LANTA and hold.

ASOS	WASHINGTON CENTER	UNICOM
128.125	124.05 307.0	123.05 (CTAF) L

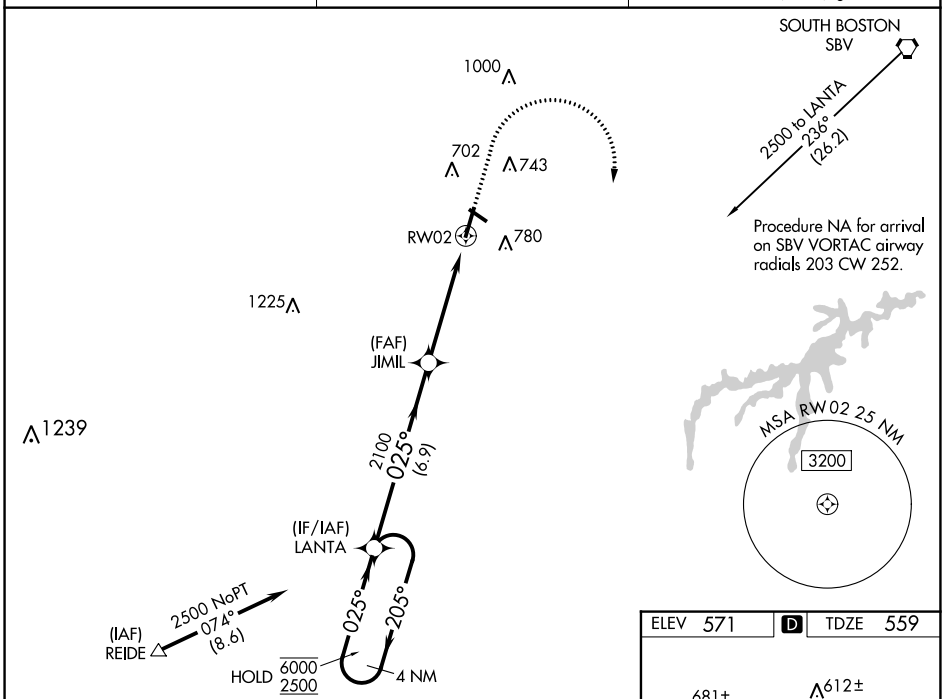

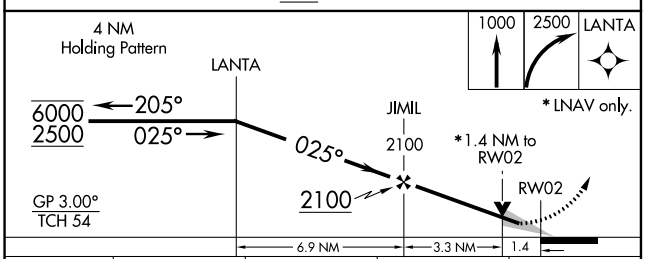
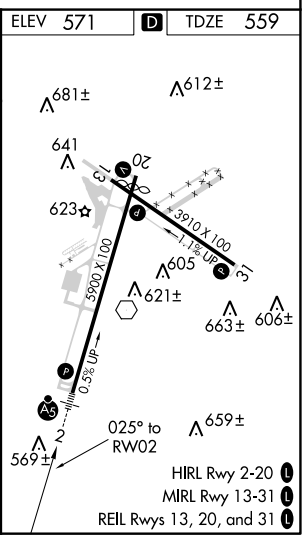
CATEGORY	A	B	C	D
LPV DA	759-½ 200 (200-½)			
LNAV/VNAV DA	924-⅝ 365 (400-⅝)			
LNAV MDA	1040-½ 481 (500-½)		1040-1 481 (500-1)	
C CIRCLING	1120-1 549 (600-1)		1120-1½ 549 (600-1½)	1200-2 629 (700-2)