

WAAS CH 69604 W22A	APP CRS 225°	Rwy Idg TDZE Apt Elev	5504 242 264
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22


THOMASVILLE RGNL (TVI)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 53°C (127°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Valdosta altimeter setting and increase LPV DA to 595, LNAV/VNAV DA to 613 and all MDA 100 feet. Increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1 SM, and increase LNAV Cat C/D visibility to 1½ SM. Increase Circling Cat C visibility to 2 SM and Circling Cat D visibility to 2¾ SM. For inop ALS, increase LPV and LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat C/D visibility to 1½ SM. VDP and Baro-VNAV NA when using Valdosta altimeter setting. Circling Rwy 4, 14, 32 NA at night. For inop ALS when using Valdosta altimeter setting, increase LPV all Cats visibility to 1½ SM, LNAV/VNAV Cat D to 1½ SM and LNAV Cat C/D to 1¾ SM.

MALSF

MISSED APPROACH:
Climb to 700 then
climbing left turn to
2000 direct GEF
VORTAC and hold.

AWOS-3PT 119.175	VALDOSTA APP CON* 126.6 285.6	UNICOM 123.075 (CTAF) 1
----------------------------	---	-----------------------------------

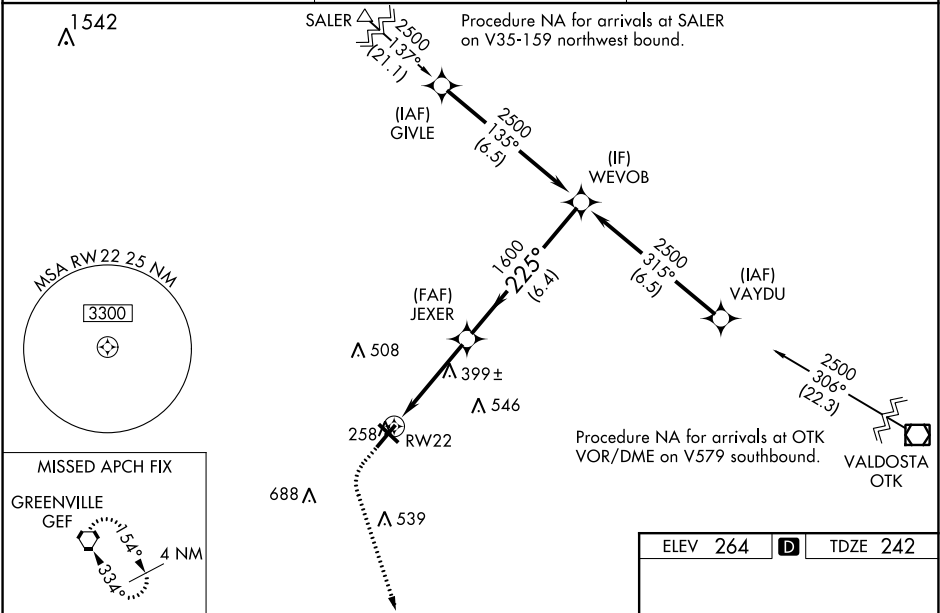

700		2000	GEF
*LNAV only.			
*1.2 NM to RWY 22			
RWY 22			
1.2		2.9 NM	6.4 NM
CATEGORY	A	B	C
LPV DA		512-¾	270 (300-¾)
LNAV/VNAV DA		530-¾	288 (300-¾)
LNAV MDA	660-¾	418 (400-¾)	660-1
CIRCLING	700-1	800-1	900-1¾
	436 (500-1)	536 (600-1)	636 (700-1¾)

