


WAAS CH 90132 W06A	APP CRS 060°	Rwy ldg TDZE 586 Apt Elev 592
--	------------------------	---


RNAV (GPS) RWY 6
NIAGARA FALLS INTL (IAG)

RNP APCH. Baro-VNAV NA when using Buffalo Niagara Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). When local altimeter setting not received, use Buffalo Niagara Intl altimeter setting and increase all DA 51 feet and all MDA 60 feet, increase LNAV Cat C and D visibility ½ SM and Circling Cat C and D ¼ SM. Rwy 6, 10R, 24, 28L helicopter visibility reduction below 1 SM NA. Straight-in Rwy 6 NA at night, Circling Rwy 6, 10R, 24, 28L NA at night.		MISSED APPROACH: Climb to 3600 direct ZUPUV and hold.
---	--	--

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	CLNC DEL 119.25 251.1	UNICOM 122.95
----------------------------	---------------------------------------	---	-------------------------------	---------------------------------	-------------------------

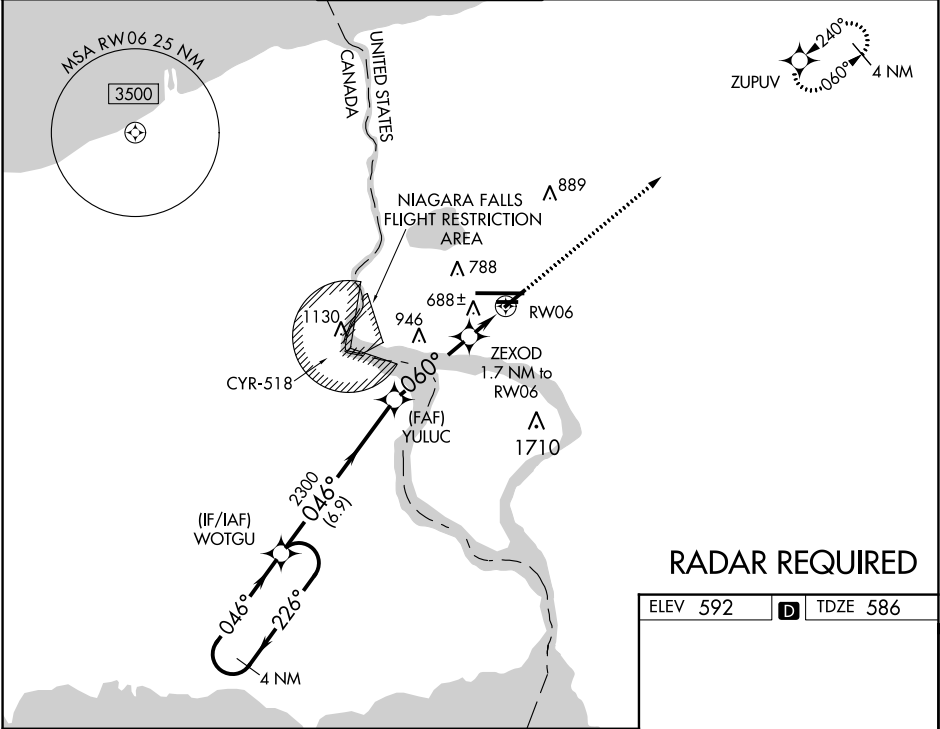

RADAR REQUIRED

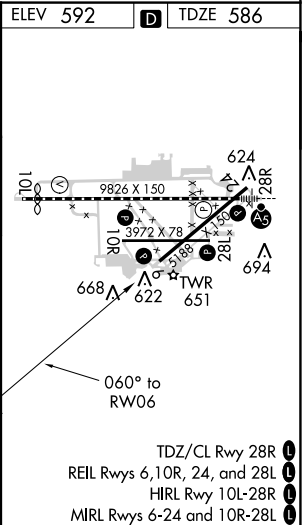

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).		3600	ZUPUV
WOTGU		YULUC	ZEXOD	RW06	
3300 ← 226°		2300	1.7 NM to RW06	* LNAV only	
GP 3.00° TCH 55		2300	* 1180		
		6.9 NM	3.5 NM	1.7 NM	
CATEGORY	A	B	C	D	
LPV DA	864-1		278 (300-1)		
LNAV/VNAV DA	849-1		263 (300-1)		
LNAV MDA	940-1		354 (400-1)		
CIRCLING	1100-1 508 (600-1)		1280-2 688 (700-2)		1280-2¼ 688 (700-2¼)