

LOC I-OSH
110.5

APP CRS
004°

Rwy Idg
8002

TDZE
808

Apt Elev
808

ILS or LOC RWY 36

WITTMAN RGNL (OSH)



⚠

When local altimeter setting not received, use Fond Du Lac altimeter setting and increase DA 31 feet and all MDA 40 feet; increase S-LOC 36 Cat C/D and Circling Cat C/D visibilities ¼ mile. For inop MALSRL when using Fond Du Lac altimeter setting, increase S-LOC 36 Cat C/D visibility to 1½ mile. Circling to Rwy 5, 23, and 31 NA at night.
* RVR 1800 authorized with the use of FD or AP or HUD to DA, NA when using Fond Du Lac altimeter setting.

MALSRL

MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 on OSH R-111 to LEWKO INT/OSH 15 DME and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 290.9	GND CON 132.3	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

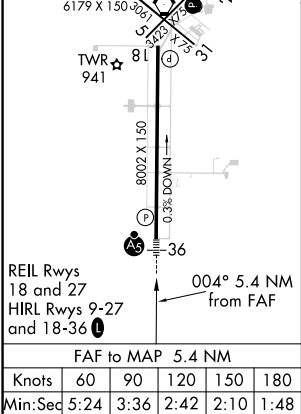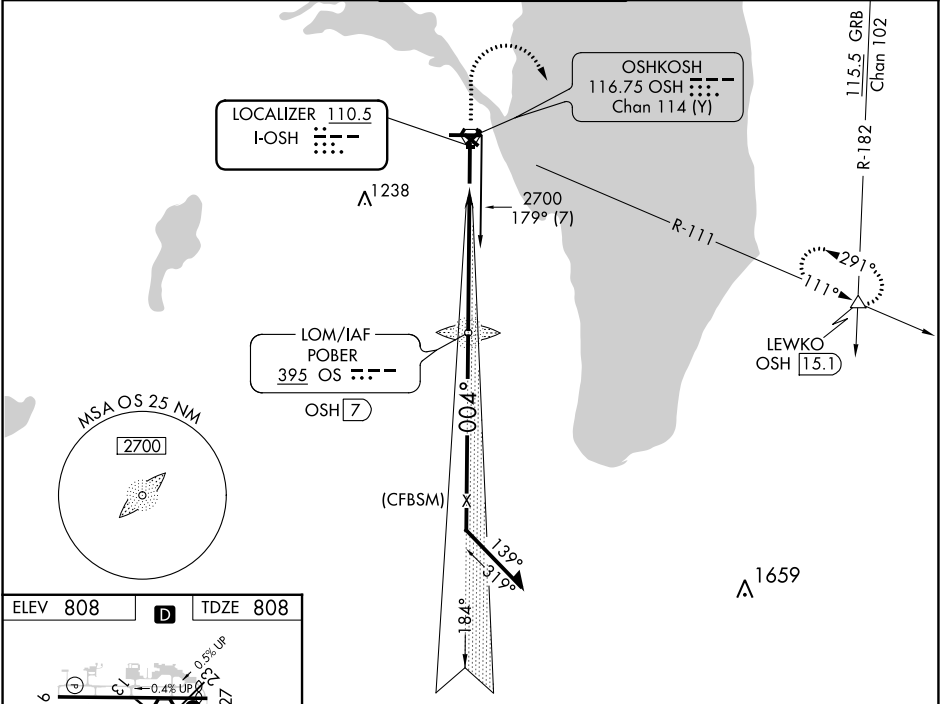

1300	3000	LEWKO	OS LOM OSH 127	Remain within 10 NM
			2610	184°
		2700	004°	2700
5.4 NM		GS 3.00°	TCH 53	
CATEGORY	A	B	C	D
S-ILS 36 *	1008/24 200 (200-½)			
S-LOC 36	1340/24 532 (600-½)		1340/55 532 (600-1)	
☒ CIRCLING	1340-1 532 (600-1)		1360-1½ 532 (600-1½) 1440-2 632 (700-2)	

EC-3, 01 DEC 2022 to 29 DEC 2022

EC-3, 01 DEC 2022 to 29 DEC 2022