


ATIS	
128.725	
GND CON	
121.7	
WILEY POST TOWER★	
126.9	306.9
OKE CITY DEP CON	
124.6	266.8

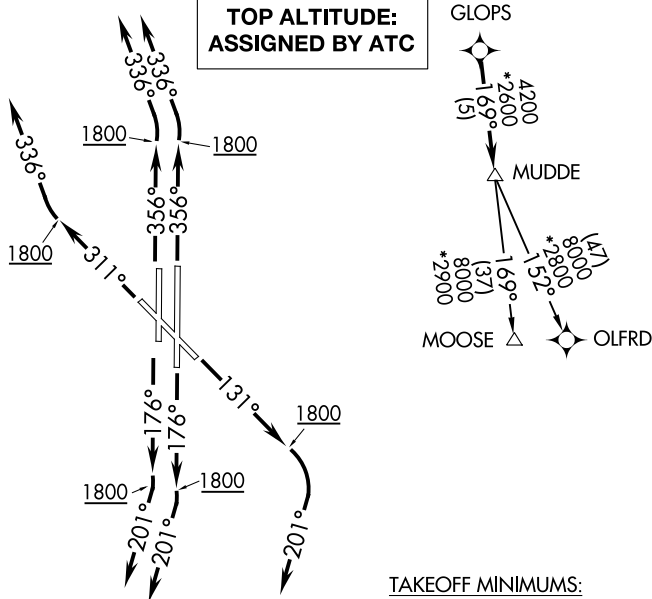

Standard with minimum climb of 500' per NM to 2100.

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

NOTE: Chart not to scale.

OLFRD TRANSITION (MUDDE3.OLFRD):