

WAAS CH 69503 W27A	APP CRS 274°	Rwy Idg 6122 TDZE 812 Apt Elev 812
--	------------------------	---

RNAV (GPS) RWY 27
ATHENS/BEN EPPS (AHN)

RNP APCH - GPS.


Y For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -99°C or above 54°C.
When local altimeter setting not received, use Winder altimeter setting; increase LPV DA to 1071 feet; increase LNAV/VNAV DA to 1121 feet; increase all MDA 60 feet and increase LNAV Cat C/D visibility to 1 mile and Circling Cat D visibility to 2 1/4 mile. For inop MALSF, increase LNAV/VNAV all Cats visibility to 3/4 mile, increase LNAV Cat C/D visibility to 1 mile. For inop MALSF when using Winder altimeter setting increase LPV all Cats visibility to 3/4 mile, increase LNAV/VNAV all Cats visibility to 1 mile, increase LNAV Cat C, D visibility to 1 1/4 mile. Baro-VNAV and VDP NA when using Winder altimeter setting. Inop table does not apply to LPV. Circling Rwy 2, 20 NA at night.

MALSF


MISSED APPROACH:
Climb to 2500 direct
SALIN and hold.

ASOS	ATLANTA APP CON ★	ATHENS TOWER ★	GND CON	CLNC DEL	CLNC DEL
132.875	132.475 291.1 316.05	126.3 (CTAF) 0 338.275	121.8	121.8	132.475 291.1 316.05 (when twr closed)

MISSED APCH FIX

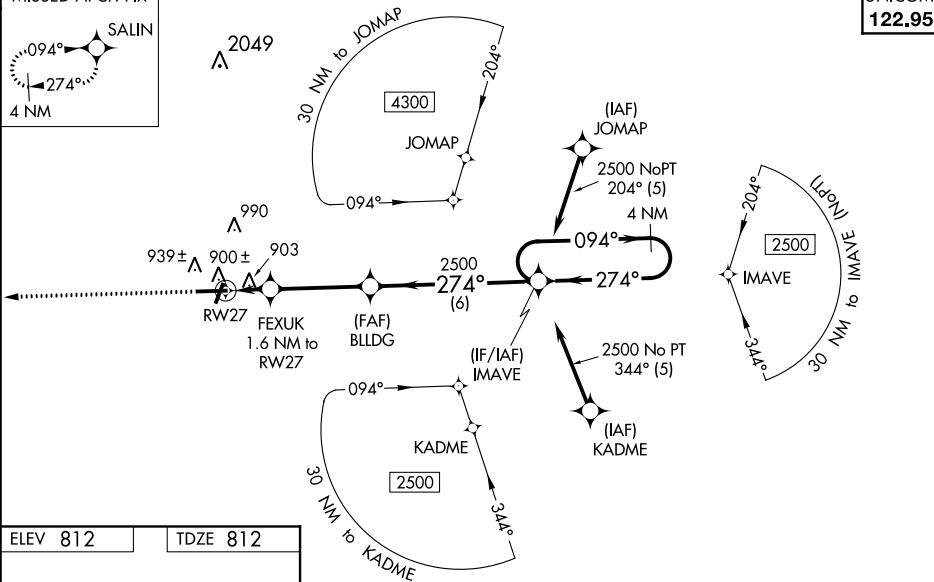

ELEV 812		TDZE 812
----------	--	----------



2500
↑
* RNAV only

SALIN

4 NM Holding Pattern

BLDDG 2500

FEXUK 1.6 NM to RW27

IMAVE

* 1 NM to RW27

RW27

274°

094°

274°

2500

* 1360

2500

GP 3.00° TCH 40

1 NM 0.6 NM 3.6 NM 6 NM

CATEGORY	A	B	C	D
LPV DA		1012- ³ / ₄	200 (200- ³ / ₄)	
RNAV/VNAV DA		1064- ³ / ₄	252 (300- ³ / ₄)	
RNAV MDA		1160- ³ / ₄	348 (400- ³ / ₄)	
CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1½ 508 (600-1½)	1460-2 648 (700-2)

SE-4, 01 DEC 2022 to 29 DEC 2022