


LOC I-FCM <u>109.7</u>	APP CRS 098°	Rwy Idg 5000 TDZE 906 Apt Elev 906
----------------------------------	------------------------	---

ILS or LOC RWY 10R
FLYING CLOUD (FCM)

	When local altimeter setting not received, use Minneapolis-St Paul Intl/Wold Chamberlain altimeter setting and increase all DA 34 feet and all MDA 40 feet, increase S-LOC Cat C and D visibility $\frac{1}{4}$ mile, GOBKE fix minimums: Increase S-LOC Cat C visibility $\frac{1}{4}$ mile. When Circling to Rwy 18, 36 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.	MALSR			MISSED APPROACH: Climb to 1800 then climbing right turn to 2700 direct FCM VOR/DME and hold, continue climb-in-hold to 2700.
--	--	--------------	--	--	---

ATIS 124.9	MINNEAPOLIS APP CON 134.7 284.7	FLYING CLOUD TOWER ★ 119.15 (CTAF) 0	GND CON 121.7	CLNC DEL 121.7 (When twr closed)	UNICOM 122.95
----------------------	---	--	-------------------------	---	-------------------------

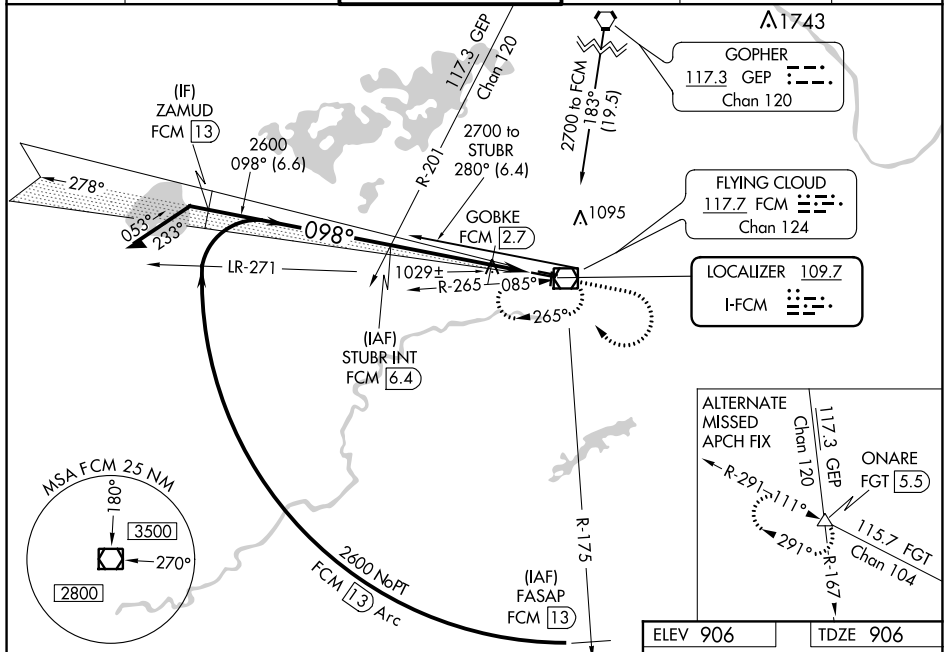

Remain within 10 NM

STUBR INT FCM (6.4)

*1440 when using Minneapolis St-Paul/Wold-Chamberlain altimeter setting.

1800

2700

FCM

278°

2700

098°

2600

GOBKE FCM (2.7)

*LOC only.

FCM (1.2)

*1400


GS 3.00°

TCH 42

3.7 NM

1.5 NM

CATEGORY	A	B	C	D
S-ILS 10R	1106-½		200 (200-½)	
S-LOC 10R	1400-½	494 (500-½)	1400-¾ 494 (500-¾)	1400-1 494 (500-1)
C CIRCLING	1400-1 494 (500-1)	1440-1 534 (600-1)	1440-1½ 534 (600-1½)	1540-2 634 (700-2)
GOBKE FIX MINIMUMS (DME REQUIRED)				
S-LOC 10R	1280-½ 374 (400-½)			1280-¾ 374 (400-¾)
C CIRCLING	1320-1 414 (500-1)	1440-1 534 (600-1)	1440-1½ 534 (600-1½)	1540-2 634 (700-2)

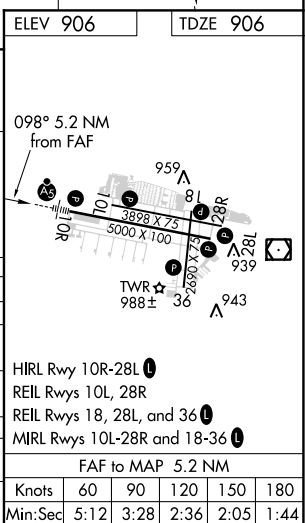

FLYING CLOUD (FCM)
ILS or LOC RWY 10R