

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>62923</b><br><b>W28A</b> | APP CRS<br><b>283°</b> | Rwy Idg<br>TDZE <b>546</b><br>Apt Elev <b>546</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 28

ASHLAND RGNL (DWU)



▼

▲

DME/DME RNP-0.3 NA. When local altimeter setting not received; use Huntington altimeter setting, increase all MDA 80 feet and all Circling visibilities ¼ mile. VDP NA when using Huntington altimeter setting.

MISSED APPROACH:  
Climb to 3300 direct  
NYOME and hold.

|                            |                                          |                          |                                        |
|----------------------------|------------------------------------------|--------------------------|----------------------------------------|
| AWOS-3PT<br><b>132.425</b> | HUNTINGTON APP CON<br><b>128.4 270.1</b> | CLNC DEL<br><b>121.7</b> | UNICOM<br><b>122.8 (CTAF)</b> <b>0</b> |
|----------------------------|------------------------------------------|--------------------------|----------------------------------------|

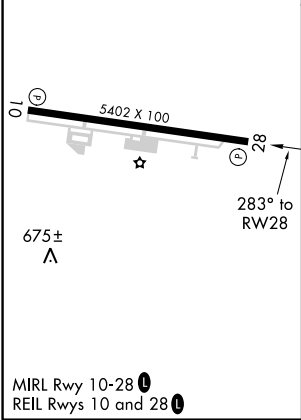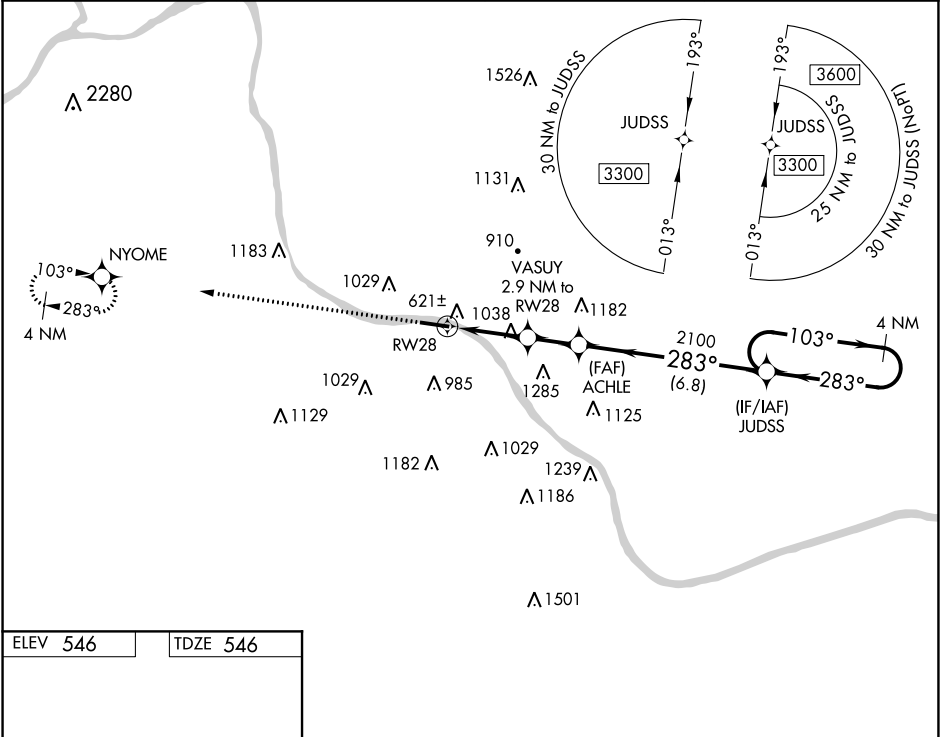

|          |                       |                         |                         |                         |
|----------|-----------------------|-------------------------|-------------------------|-------------------------|
| 3300     | NYOME                 | Descent Angle NA.       | JUDSS                   | 4 NM Holding Pattern    |
| 1.7 NM   | 1.2 NM                | 1.8 NM                  | 6.8 NM                  |                         |
| CATEGORY | A                     | B                       | C                       | D                       |
| LP MDA   | 1340-1<br>794 (800-1) | 1340-1¼<br>794 (800-1¼) | 1340-2½<br>794 (800-2½) |                         |
| LNAV MDA | 1340-1<br>794 (800-1) | 1340-1¼<br>794 (800-1¼) | 1340-2½<br>794 (800-2½) |                         |
| CIRCLING | 1340-1<br>794 (800-1) | 1380-1¼<br>834 (900-1¼) | 1400-2½<br>854 (900-2½) | 1420-2¾<br>874 (900-2¾) |