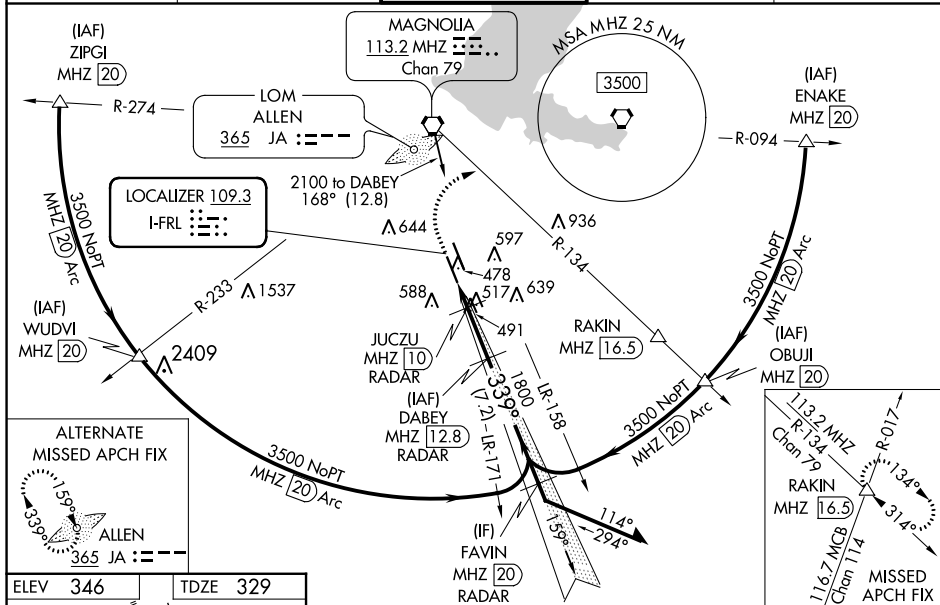


ILS or LOC RWY 34L
JACKSON-MEDGAR WILEY EVERS INTL (JAN)

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 on heading 070° and MHZ VORTAC R-134 to RAKIN INT/MHZ 16.5 DME and hold.

UNICOM
122.95

REIL Rwys 16R and 34R
 HIRL Rwys 16L-34R and 16R-34L

339° 4.4 NM from FAF

FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

1200 3000 MHZ R-134 RAKIN

↑ hdg 070° △

**LOC only.

JUCZU MHZ 10 RADAR

MHZ 8.5

MHZ 1800

159° 339° 2100

**860 when using Hawkins Fld altimeter setting.

Remain within 10 NM

1800

GS 3.00° TCH 58

1.5 2.9 NM

CATEGORY	A	B	C	D	E
S-ILS 34L	529/18 200 (200-1/2)				
S-LOC 34L	840/40	511 (500-3/4)	840/55	511 (500-1)	
 CIRCLING	880-1 534 (600-1)	900-1 554 (600-1)	900-1 1/2 554 (600-1 1/2)	960-2 614 (700-2)	1040-2 1/2 694 (700-2 1/2)
JUCZU DME MINIMUMS #					
S-LOC 34L	760/40 431 (500-3/4)				
 CIRCLING	880-1 534 (600-1)	900-1 554 (600-1)	900-1 1/2 554 (600-1 1/2)	960-2 614 (700-2)	1040-2 1/2 694 (700-2 1/2)