

WAAS CH 48911 W13A	APP CRS 128°	Rwy Idg TDZE Apt Elev	4500 1885 1915
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 13

POCONO MOUNTAINS RGNL (MPO)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18° C (0° F) or above 54° C (130° F).
▲ Baro-VNAV and VDP NA when using Wilkes-Barre/Scranton altimeter setting. Rwy 13 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wilkes-Barre/Scranton altimeter setting: increase LPV DA to 2450 feet, LNAV/VNAV DA to 2537 feet and all visibilities ½ SM; increase all MDAs 180 feet and visibility LNAV Cat C/D ¾ SM and Circling Cat C/D ½ SM. Circling Rwy 23 NA at night.

MISSED APPROACH:
Climb to 3000 then climbing right turn to 4200 direct WHITT and hold.

ASOS 120.275	WILKES-BARRE APP CON 126.3 256.7	CLNC DEL 125.3	UNICOM 122.7 (CTAF) 0
------------------------	--	--------------------------	---------------------------------

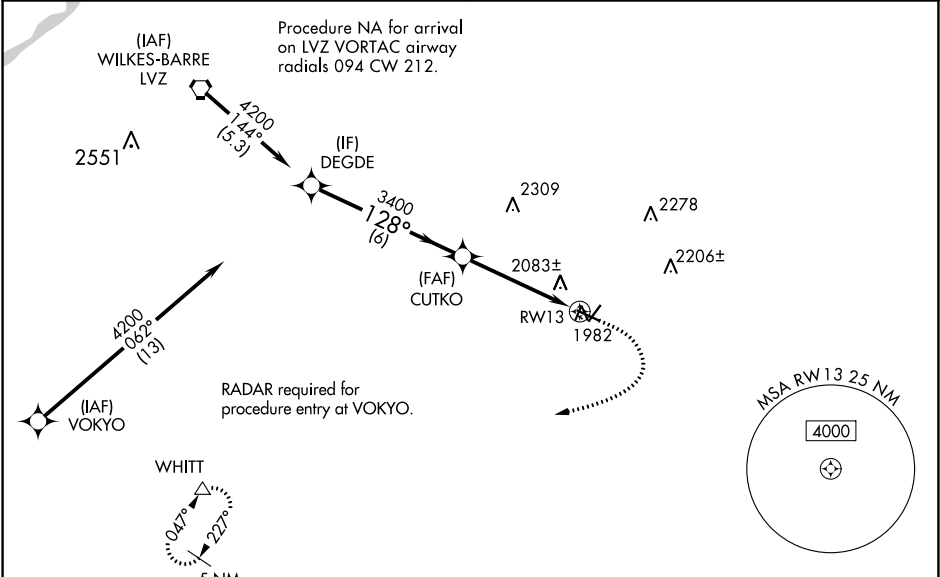

3 NM					ELEV 1915	TDZE 1885
DEGDE VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 44). CUTKO 3000 4200 WHITT GP 3.00° TCH 40 128° 3400 * LNAV only. * 1.3 NM to RW13 RW13 6 NM 3.3 NM 1.3					128° to RW13 5001 X 75 3995 X 100 170° Up REIL Rwy 31 REIL Rws 5, 13, and 23 MIRL Rws 5-23 and 13-31	
CATEGORY	A		B	C	D	
LPV DA	2271-1¼		386 (400-1¼)			
LNAV/VNAV DA	2358-1½		473 (500-1½)			
LNAV MDA	2340-1 455 (500-1)		2340-1¾ 455 (500-1¾)			
CIRCLING	2420-1 505 (600-1)	2500-1 585 (600-1)	2600-2 685 (700-2)	2660-2½ 745 (800-2½)		