

WAAS
CH **72631**
W35A

APP CRS
354°

Rwy Idg
TDZE **324**
Apt Elev **325**

RNAV (GPS) RWY 35

BRUCE CAMPBELL FLD (MBO)


RNP APCH.

Baro-VNAV and VDP NA when using Jackson-Medgar Wiley Evers Intl altimeter setting.

Rwy 35 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Jackson-Medgar Wiley Evers Intl altimeter setting and increase all DA 21 feet and visibility ½ SM, increase all MDA 40 feet and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 2400 direct DUHAB and hold.

AWOS-3PT 119.125	JACKSON APP CON ★ 123.9 317.7	CLNC DEL 125.9	UNICOM 122.8 (CTAF) 0
----------------------------	---	--------------------------	---------------------------------

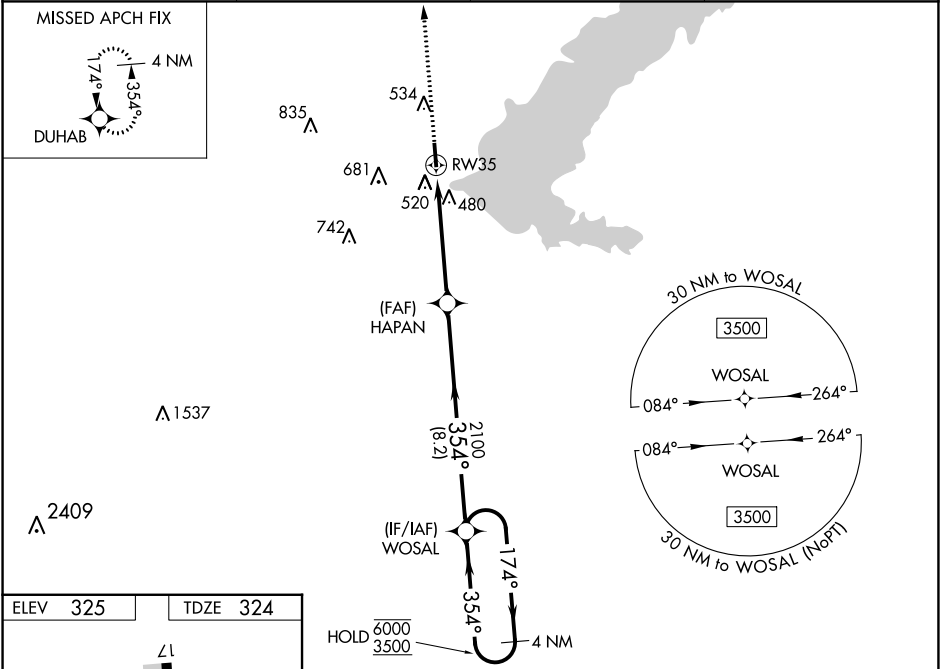

ELEV 325	TDZE 324	2400 DUHAB 2100 HAPAN 2100 WOSAL 354° 174° 4 NM Holding Pattern 6000 3500 *LNAV only. *1 NM to RWY35 1 NM 4 NM 8.2 NM			
CATEGORY		A	B	C	D
LPV DA		643- 7⁄8 319 (400-7⁄8)			
LNAV/VNAV DA		750-1¼ 426 (500-1¼)			
LNAV MDA		780-1	456 (500-1)	780-1¾	456 (500-1¾)
CIRCLING		820-1 495 (500-1)	840-1 515 (600-1)	1040-2 715 (800-2)	1040-2¼ 715 (800-2¼)